



5mm Square Track Mounted Switches

UBR, UBSC, and UBSK

Compatible and Tested for use with:

Ultran Band Cylinders (25mm to 63mm bore sizes)




Part Numbers

Part Number	Description
UBR	Reed Switch, 2 wire, LED, 240 V, 100mA, 24" Pigtail Leads
UBRQ	Reed Switch, 2 wire, LED, 240 V, 100mA, with M8 Male Connector
UBRQC	Reed Switch, 2 wire, LED, 240 V, 100mA, with M8 Male Connector and 2m Mating Cable
UBRQCX	Reed Switch, 2 wire, LED, 240 V, 100mA, with M8 Male Connector and 5m Mating Cable
UBSC	Sourcing Switch (PNP), LED, 30 VDC, 200mA with 24" Pigtail Leads
UBSCQ	Sourcing Switch (PNP), LED, 30 VDC, 200mA with M8 Male Connector
UBSCQC	Sourcing Switch (PNP), LED, 30 VDC, 200mA with M8 Male Connector and 2m Mating Cable
UBSCQCX	Sourcing Switch (PNP), LED, 30 VDC, 200mA with M8 Male Connector and 5m Mating Cable
UBSK	Sinking Switch (NPN), LED, 30 VDC, 200mA with 24" Pigtail Leads
UBSKQ	Sinking Switch (NPN), LED, 30 VDC, 200mA with M8 Male Connector
UBSKQC	Sinking Switch (NPN), LED, 30 VDC, 200mA with M8 Male Connector and 2m Mating Cable
UBSKQCX	Sinking Switch (NPN), LED, 30 VDC, 200mA with M8 Male Connector and 5m Mating Cable




Dimensions

5mm Square Track Mounted Switches Magnetic Sensor Dimensional Data

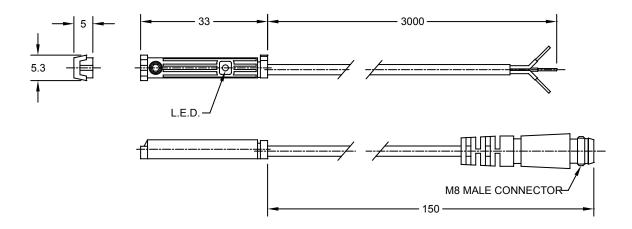


Wiring Diagrams



Pin and Wire Assignments for Quick Connect


Switch "Q" Option Male Connector

Face View of M8 Male Connector




C4 and C5 Cable Female Connector

Side View of M8 Female Connector



UB Series, 5mm Square Track (Ultran®), Reed or Solid State Switches

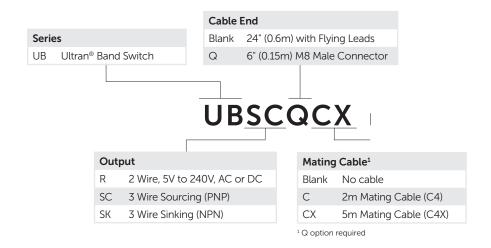

Compatible and Tested for use with:

 Ultran® Band Cylinders (25mm to 63mm bore sizes)

