

MGZ Series Relief Valves


Engineering Specifications

Model	MGZ
Fluid	Air (Clean/Dry)
Actuation	Manual
Valve Type	3 Port - 2 Position
Pressure Range	0 to 130 psi (0 to 0.9 MPa)
Proof Pressure	215 psi (1.5 MPa)
Temperature Range	-4 °F to 158 °F (-20 °C to 70 °C)
Material	Aluminum Alloy Body
Mounting	Individual Stamped Steel Bracket or Modular Connecting Kit
Knob Motion	90° Twist
Includes	Modular Connecting Kit / Stamped Steel Bracket / Lock and Key

¹ See Valves catalog for explosion proof specifications



Dimensions (mm)

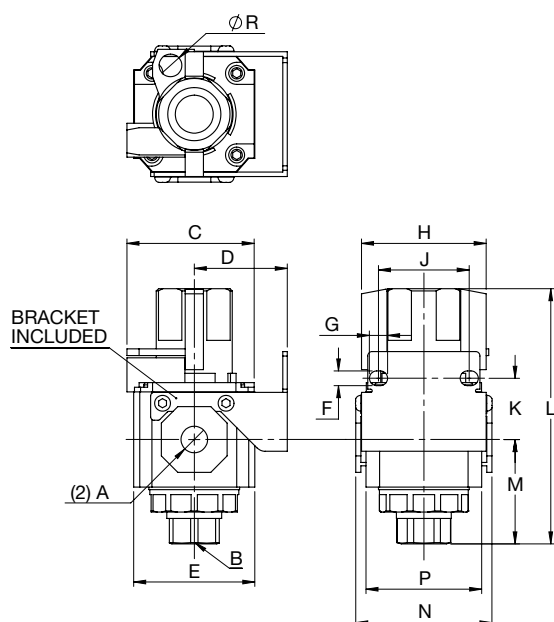

Model	A	B	C	D	E	F	G
MGZ200-06	1/8 NPT	1/4 NPT	42.5	30	40	5.5	8.5
MGZ200-08	1/4 NPT	1/4 NPT	42.5	30	40	5.5	8.5
MGZ300-08	1/4 NPT	3/8 NPT	56.5	41	53.4	6.5	8
MGZ300-10	3/8 NPT	3/8 NPT	56.5	41	53.4	6.5	8
MGZ400-15	1/2 NPT	1/2 NPT	66	50	64	8.5	11

Model	H	J	K	L	M	N	P	R
MGZ200-06	42	27	23	89	36.5	47	38	7.1
MGZ200-08	42	27	23	89	36.5	47	38	7.1
MGZ300-08	55	40	27	112.5	46	60	51	9.3
MGZ300-10	55	40	27	112.5	46	60	51	9.3
MGZ400-15	65	55	33.5	134	58.5	75	63	10.5

Modular Connection Kit (included)

