



EF Cylinder

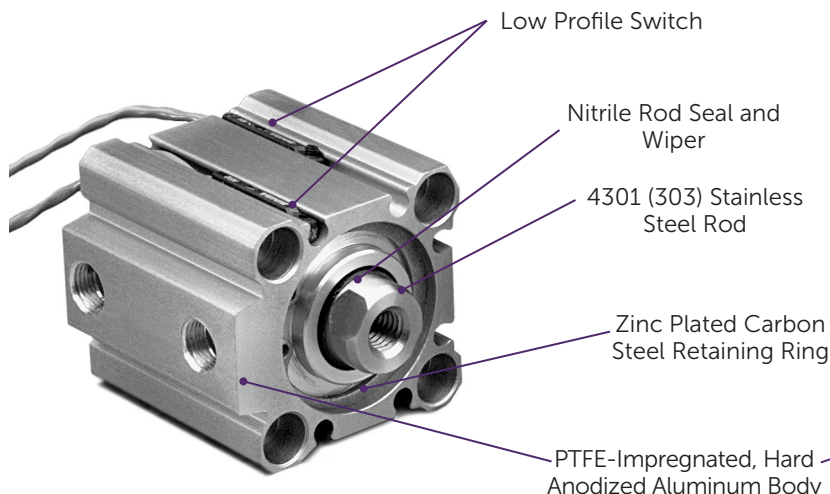

Not Pictured:

- Bronze Bushing (12-20mm);
Self-lubricating Nylon (25-100mm)
- Bronze Rod Guide (12-20mm);
Anodized Aluminum (25-100mm)
- Nitrile Rod Guide Seal
- Nitrile Piston Seal
- High Strength Aluminum Alloy Piston

EFT Cylinder

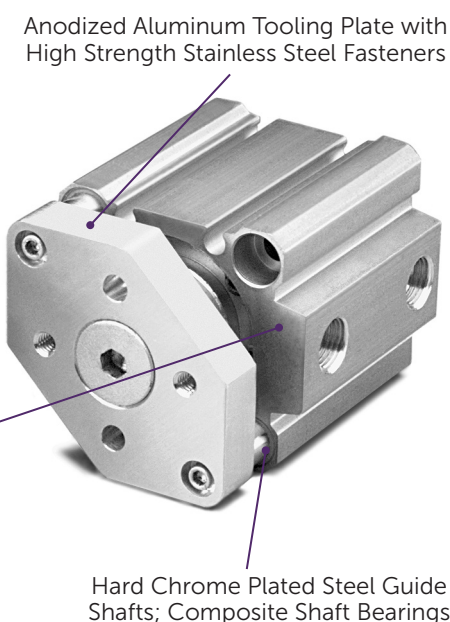

The IMI Bimba EF Series is a compact, aluminum-extruded body air cylinder designed for international machine requirements. The body is anodized in a special PTFE-impregnation process that provides superior wear characteristics. With its streamlined look, low cost and low-profile switch, it is an excellent choice for space-saving machine design.

Features and Benefits

- PTFE-impregnated, hard anodized aluminum body provides superior wear resistance. Expected service life is 2500 kilometers.
- Very compact; dimensionally-interchangeable with similar compact extruded aluminum body cylinders.
- Very low profile, compact switch slides into groove within cylinder geometry.
- EF1 cylinders are available in four models: double acting, single or double rod end; and single acting, spring return or extend, and EF2 cylinders are available in double acting, non-rotating.
- EFDT cylinders are available as a double acting, double ended, non-rotating rod cylinder to provide an additional operation feature from the cylinder rear.
- Both models are available in ten bore sizes from 12mm to 100mm.
- Wide variety of standard stroke lengths in 5mm increments; additional stroke lengths available.
- Standard cylinder is completely metric in design; with Option -E, threaded mounting options, rod threads and ports are in U.S. customary units (inch).
- Mounting options include threaded bottom mounting and threaded front/rear mounting option.
- Options include bumpers, ports and threaded mounting option and rod threads in U.S. customary units, magnetic position sensing, and high temperature seals.
- X option for EFT and EFDT cylinders only. This option increases stability by at least two times and up to 23 times depending on bore size. In addition, the X option more than doubles the maximum cylinder side load and moment!



EF1 Cylinder Options and Dimensions (in)

IMI Bimba is a JIT manufacturer and we are able to provide EF model cylinders in *ANY 1mm of stroke length increment for all option styles within our standard three-day lead time. Longer stroke lengths are also available upon request at standard lead times. Please consult Technical Assistance at 800-44-BIMBA for help. The table below represents our standard stroke lengths.

Stroke Length Availability

Nominal Bore Diameter	Double Acting		Single Acting	
	EF Single Rod End (mm)	EFD Double Rod End (mm)	EFS Single Acting Spring Retract (mm)	EFR* Reverse Acting Spring Extend (mm)
12mm (1/2")	5, 10, 15, 20, 25, 30	5, 10, 15, 20, 25, 30	5, 10	5, 10
16mm (5/8")	5, 10, 15, 20, 25, 30	5, 10, 15, 20, 25, 30	5, 10	5, 10
20mm (3/4")	5, 10, 15, 20, 25, 30, 35, 40, 45, 50	5, 10, 15, 20, 25, 30, 35, 40, 45, 50	5, 10	5, 10
25mm (1")	5, 10, 15, 20, 25, 30, 35, 40, 45, 50	5, 10, 15, 20, 25, 30, 35, 40, 45, 50	5, 10	5, 10
32mm (1-1/4")	5, 10, 15, 20, 25, 30, 35, 40, 45, 50, 75, 100	5, 10, 15, 20, 25, 30, 35, 40, 45, 50, 75, 100	5, 10	5, 10
40mm (1-1/2")	5, 10, 15, 20, 25, 30, 35, 40, 45, 50, 75, 100	5, 10, 15, 20, 25, 30, 35, 40, 45, 50, 75, 100	5, 10, 15, 20	5, 10
50mm (2")	10, 15, 20, 25, 30, 35, 40, 45, 50, 75, 100	10, 15, 20, 25, 30, 35, 40, 45, 50, 75, 100	10, 15, 20	10, 20
63mm (2-1/2")	10, 15, 20, 25, 30, 35, 40, 45, 50, 75, 100	10, 15, 20, 25, 30, 35, 40, 45, 50, 75, 100	10, 15, 20, 25	20, 25
80mm (3-1/4")	10, 15, 20, 25, 30, 35, 40, 45, 50, 75, 100	10, 15, 20, 25, 30, 35, 40, 45, 50, 75, 100	10, 15, 20, 25	20, 25
100mm (4")	10, 15, 20, 25, 30, 35, 40, 45, 50, 75, 100	10, 15, 20, 25, 30, 35, 40, 45, 50, 75, 100	N/A	N/A

*EFR style is only available as a standard with the strokes listed in the table above. Any other stroke length must be ordered as a special.

Engineering Specifications

Operating Medium:

Air

Maximum Operating Pressure:

140 PSI (10 bar)

Ambient and Fluid Temperature:

15° F to 160° F (-10° C to 70° C)

Lubrication:

PTFE impregnated grease

Standard Rod End:

Female

Stroke Tolerance:

12-50mm bore: ± .6mm (.025 inch)

63-100mm bore: ± .8mm (.030 inch)

Cylinder Mounting (Standard):

Through hole with counterbores both ends

Cylinder Mounting (Optional):

Front and Rear threaded

Side mount threaded

Rear Clevis

Expected Service Life:

1500 miles (2500 kilometers)*

*For filtered, lubricated air, no-load conditions;
if unlubricated, life is approximately 1/3.

EF1 Cylinder Options and Dimensions (in)

Maximum Side Loads kg-Force (lb)

Bore	Stroke Length					
	5mm	10mm	15mm	20mm	25mm	30mm
12mm (1/2")	0.27 (0.60)	0.22 (0.49)	0.19 (0.41)	0.16 (0.35)	0.14 (0.31)	0.12 (0.27)
16mm (5/8")	0.33 (0.73)	0.27 (0.59)	0.23 (0.50)	0.20 (0.43)	0.17 (0.38)	0.15 (0.34)
20mm (3/4")	0.34 (0.74)	0.27 (0.60)	0.23 (0.51)	0.20 (0.44)	0.18 (0.39)	0.16 (0.35)
25mm (1")	0.54 (1.18)	0.45 (0.99)	0.38 (0.85)	0.34 (0.74)	0.30 (0.66)	0.27 (0.59)
32mm (1-1/4")	1.28 (2.81)	1.08 (2.38)	0.94 (2.07)	0.83 (1.83)	0.74 (1.64)	0.67 (1.48)
40mm (1-1/2")	2.27 (4.99)	1.97 (4.34)	1.75 (3.84)	1.57 (3.44)	1.42 (3.12)	1.30 (2.85)
50mm (2")	N/A	2.40 (5.29)	2.13 (4.69)	1.92 (4.22)	1.74 (3.83)	1.60 (3.51)
63mm (2-1/2")	N/A	3.18 (6.99)	2.85 (6.27)	2.58 (5.69)	2.36 (5.20)	2.18 (4.80)
80mm (3-1/4")	N/A	5.94 (13.06)	5.41 (11.91)	4.97 (10.94)	4.60 (10.12)	4.28 (9.41)
100mm (4")	N/A	9.14 (20.10)	8.45 (18.58)	7.85 (17.28)	7.34 (16.14)	6.88 (15.15)

Bore	Stroke Length					
	35mm	40mm	45mm	50mm	75mm	100mm
12mm (1/2")	0.11 (0.25)	0.10 (0.23)	N/A	N/A	N/A	N/A
16mm (5/8")	0.14 (0.30)	0.13 (0.28)	N/A	N/A	N/A	N/A
20mm (3/4")	0.14 (0.32)	0.13 (0.29)	0.12 (0.27)	0.11 (0.25)	N/A	N/A
25mm (1")	0.24 (0.54)	0.22 (0.49)	0.21 (0.46)	0.19 (0.42)	N/A	N/A
32mm (1-1/4")	0.61 (1.35)	0.57 (1.25)	0.52 (1.15)	0.49 (1.07)	0.36 (0.80)	0.29 (0.64)
40mm (1-1/2")	1.19 (2.63)	1.11 (2.44)	1.03 (2.27)	0.97 (2.12)	0.73 (1.61)	0.59 (1.30)
50mm (2")	1.47 (3.24)	1.37 (3.01)	1.27 (2.80)	1.19 (2.63)	0.91 (2.00)	0.73 (1.61)
63mm (2-1/2")	2.02 (4.45)	1.88 (4.15)	1.76 (3.88)	1.66 (3.65)	1.28 (2.81)	1.04 (2.29)
80mm (3-1/4")	4.00 (8.79)	3.75 (8.25)	3.53 (7.78)	3.34 (7.35)	2.62 (5.77)	2.16 (4.75)
100mm (4")	6.48 (14.27)	6.13 (13.48)	5.81 (12.78)	5.52 (12.15)	4.43 (9.74)	3.69 (8.13)

EF1 Cylinder Options and Dimensions (in)

Theoretical Cylinder Forces

FORCE = Power Factor x Input Pressure

Bore	Direction	Power Factor* (When input pressure in bar)	Power Factor** (When input pressure in psi)
12mm (1/2")	Extend	1.1	(0.2)
	Retract	0.8	(0.1)
16mm (5/8")	Extend	2.0	(0.3)
	Retract	1.5	(0.2)
20mm (3/4")	Extend	3.1	(0.5)
	Retract	2.4	(0.4)
25mm (1")	Extend	4.9	(0.8)
	Retract	3.8	(0.6)
32mm (1-1/4")	Extend	8.0	(1.2)
	Retract	6.0	(0.9)
40mm (1-1/2")	Extend	12.6	(1.9)
	Retract	10.6	(1.6)
50mm (2")	Extend	19.6	(3.0)
	Retract	16.5	(2.6)
63mm (2-1/2")	Extend	31.2	(4.8)
	Retract	28.0	(4.3)
80mm (3-1/4")	Extend	50.3	(7.8)
	Retract	45.4	(7.0)
100mm (4")	Extend	78.5	(12.2)
	Retract	71.5	(11.1)

EF1 Cylinder Options and Dimensions (in)

Enclosed Spring Forces

Action	Bore	Compressed Spring Force N (lb)	Spring Rate N/mm (lb/in)
Spring Acting Spring Return	12mm (1/2")	12.8 (2.9)	0.8 (4.8)
	16mm (5/8")	16.0 (3.6)	1.0 (5.7)
	20mm (3/4")	18.1 (4.1)	1.2 (6.9)
	25mm (1")	21.4 (4.8)	1.1 (6.4)
	32mm (1-1/4")	22.2 (5.0)	0.8 (4.3)
	40mm (1-1/2")	33.1 (7.4)	0.9 (5.1)
	50mm (2")	53.8 (12.1)	1.2 (6.7)
	63mm (2-1/2")	89.0 (20.0)	2.1 (11.8)
	80mm (3-1/4")	106.8 (24.0)	2.3 (13.2)
	100mm (4")	N/A (N/A)	N/A (N/A)
Reverse Acting Spring Extend	12mm; 5mm stroke	10.9 (2.5)	1.6 (9.1)
	12mm; 10mm stroke	11.0 (2.5)	0.8 (4.6)
	16mm; 5mm stroke	20.7 (4.7)	3.4 (19.5)
	16mm; 10mm stroke	20.9 (4.7)	1.8 (10.3)
	20mm	27.3 (6.1)	2.3 (12.9)
	25mm	29.1 (6.5)	2.0 (11.2)
	32mm	26.6 (6.0)	0.9 (5.1)
	40mm	30.1 (6.8)	1.2 (7.1)
	50mm	81.9 (18.4)	2.9 (16.7)
	63mm; 20mm stroke	95.3 (21.4)	3.0 (16.7)
	63mm; 25mm stroke	95.3 (21.4)	2.4 (13.3)
	80mm; 20mm stroke	110.8 (24.9)	3.2 (17.8)
	80mm; 25mm stroke	110.9 (24.9)	2.5 (14.2)
	100mm	N/A (N/A)	N/A (N/A)

EF1 Cylinder Options and Dimensions (mm [in])

Double Acting/Single Rod


Bore	A	B	C	D	E	F	H
12mm (1/2")	3.8 (0.15)	17.0 (0.67)	8.9 (0.35)	M5 x 0.8 (#10-32)	6.0 (0.24)	3.5 (0.14)	15.5 (0.61)
16mm (5/8")	4.6 (0.18)	18.5 (0.73)	9.4 (0.37)	M5 x 0.8 (#10-32)	8.0 (0.31)	3.5 (0.14)	20.0 (0.79)
20mm (3/4")	4.8 (0.19)	19.5 (0.77)	9.4 (0.37)	M5 x 0.8 (#10-32)	10.0 (0.39)	4.5 (0.18)	25.5 (1.00)
25mm (1")	5.1 (0.20)	22.5 (0.89)	10.9 (0.43)	M5 x 0.8 (#10-32)	12.0 (0.47)	5.0 (0.20)	28.0 (1.10)
32mm (1-1/4")	7.1 (0.28)	23.0 (0.91)	10.4 (0.41)	G - 1/8 (NPT 1/8)	16.0 (0.63)	7.0 (0.28)	34.0 (1.34)
40mm (1-1/2")	7.4 (0.29)	29.5 (1.16)	13.2 (0.52)	G - 1/8 (NPT 1/8)	16.0 (0.63)	7.0 (0.28)	40.0 (1.57)
50mm (2")	9.4 (0.37)	30.5 (1.20)	13.7 (0.54)	G - 1/4 (NPT 1/4)	20.0 (0.79)	8.0 (0.31)	50.0 (1.97)
63mm (2-1/2")	9.7 (0.38)	36.0 (1.42)	15.7 (0.62)	G - 1/4 (NPT 1/4)	20.0 (0.79)	8.0 (0.31)	60.0 (2.36)
80mm (3-1/4")	11.7 (0.46)	43.5 (1.71)	17.8 (0.70)	G - 3/8 (NPT 3/8)	25.0 (0.98)	10.0 (0.39)	77.0 (3.03)
100mm (4")	12.2 (0.48)	53.0 (2.09)	24.4 (0.96)	G - 3/8 (NPT 3/8)	30.0 (1.18)	12.0 (0.47)	94.0 (3.70)

Bore	I	J	K	L	M	N	O
12mm (1/2")	N/A	6.1 (0.24)	3.5 (0.14)	3.5 (0.14)	25.0 (0.98)	5.0 (0.19)	25.0 (0.98)
16mm (5/8")	8.7 (0.34)	6.5 (0.26)	3.5 (0.14)	3.5 (0.14)	29.0 (1.14)	6.0 (0.25)	29.0 (1.14)
20mm (3/4")	9.5 (0.37)	9.0 (0.35)	7.0 (0.28)	5.5 (0.22)	36.0 (1.42)	8.0 (0.31)	36.0 (1.42)
25mm (1")	10.3 (0.41)	9.0 (0.35)	7.0 (0.28)	5.5 (0.22)	40.0 (1.57)	10.0 (0.38)	40.0 (1.57)
32mm (1-1/4")	18.5 (0.73)	9.0 (0.35)	7.0 (0.28)	5.5 (0.22)	45.0 (1.77)	14.0 (0.56)	49.5 (1.95)
40mm (1-1/2")	17.3 (0.68)	9.0 (0.35)	7.0 (0.28)	5.5 (0.22)	52.0 (2.05)	14.0 (0.56)	57.0 (2.24)
50mm (2")	20.0 (0.79)	11.1 (0.44)	8.0 (0.31)	6.9 (0.27)	64.0 (2.52)	17.0 (0.69)	71.0 (2.80)
63mm (2-1/2")	20.0 (0.79)	14.1 (0.56)	10.5 (0.41)	8.8 (0.35)	77.0 (3.03)	17.0 (0.69)	84.0 (3.31)
80mm (3-1/4")	26.0 (1.02)	17.5 (0.69)	13.5 (0.53)	11.0 (0.43)	98.0 (3.86)	22.0 (0.88)	104.0 (4.09)
100mm (4")	26.0 (1.02)	17.5 (0.69)	13.5 (0.53)	11.0 (0.43)	117.0 (4.61)	27.0 (1.06)	123.5 (4.86)

Bore	P	Q	R
12mm (1/2")	32.0 (1.26)	5.3 (0.21)	M3 x 0.5 6H (#8-32 UNC-2B)
16mm (5/8")	38.0 (1.50)	7.8 (0.31)	M4 x 0.7 6H (#8-32 UNC-2B)
20mm (3/4")	47.0 (1.85)	10.5 (0.41)	M5 x 0.8 6H (#10-32 UNF-2B)
25mm (1")	52.0 (2.05)	11.5 (0.45)	M6 x 1.0 6H (1/4-28 UNF-2B)
32mm (1-1/4")	60.0 (2.36)	17.7 (0.70)	M8 x 1.25 6H (5/16-24 UNF-2B)
40mm (1-1/2")	69.0 (2.72)	24.5 (0.96)	M8 x 1.25 6H (3/8-24 UNF-2B)
50mm (2")	86.0 (3.39)	29.3 (1.16)	M10 x 1.5 6H (1/2-20 UNF-2B)
63mm (2-1/2")	103.0 (4.06)	29.1 (1.15)	M10 x 1.5 6H (1/2-20 UNF-2B)
80mm (3-1/4")	132.0 (5.20)	28.1 (1.11)	M16 x 2.0 6H (5/8-18 UNF-2B)
100mm (4")	156.0 (6.14)	32.3 (1.27)	M20 x 2.5 6H (3/4-16 UNF-2B)

*See page 205 for overall body length with MRS option.

When option E is specified, user interface threads are designated U.S. customary (inch). This includes ports, rod threads and threaded mounting options (as applicable).

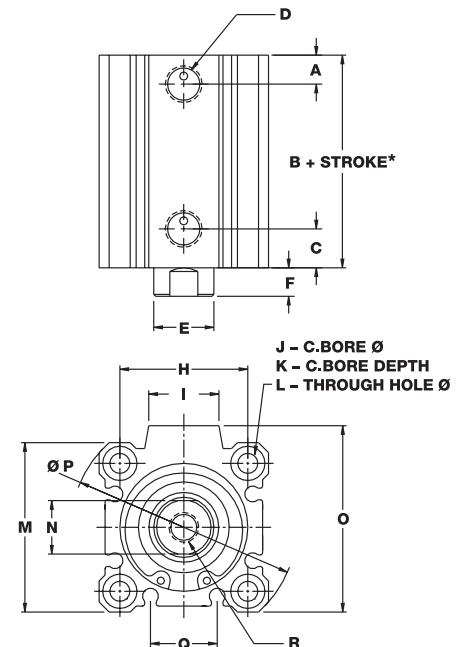

EF1 Cylinder Options and Dimensions (mm [in])

Double Acting/Double Rod


Bore	A	B	D	E	F	H	I
12mm (1/2")	10.6 (0.42)	25.2 (0.99)	M5 x 0.8 (#10-32)	6.0 (0.24)	3.5 (0.14)	15.5 (0.61)	N/A
16mm (5/8")	10.7 (0.42)	26.0 (1.03)	M5 x 0.8 (#10-32)	8.0 (0.31)	3.5 (0.14)	20.0 (0.79)	8.7 (0.34)
20mm (3/4")	10.1 (0.40)	26.0 (1.03)	M5 x 0.8 (#10-32)	10.0 (0.39)	4.5 (0.18)	25.5 (1.00)	9.5 (0.37)
25mm (1")	11.2 (0.44)	29.0 (1.14)	M5 x 0.8 (#10-32)	12.0 (0.47)	5.0 (0.20)	28.0 (1.10)	10.3 (0.41)
32mm (1-1/4")	8.9 (0.35)	30.5 (1.20)	G - 1/8 (NPT 1/8)	16.0 (0.63)	7.0 (0.28)	34.0 (1.34)	18.5 (0.73)
40mm (1-1/2")	13.1 (0.52)	40.0 (1.58)	G - 1/8 (NPT 1/8)	16.0 (0.63)	7.0 (0.28)	40.0 (1.57)	17.3 (0.68)
50mm (2")	12.2 (0.48)	40.5 (1.60)	G - 1/4 (NPT 1/4)	20.0 (0.79)	8.0 (0.31)	50.0 (1.97)	20.0 (0.79)
63mm (2-1/2")	12.8 (0.50)	42.0 (1.66)	G - 1/4 (NPT 1/4)	20.0 (0.79)	8.0 (0.31)	60.0 (2.36)	20.0 (0.79)
80mm (3-1/4")	14.4 (0.57)	51.0 (2.01)	G - 3/8 (NPT 3/8)	25.0 (0.98)	10.0 (0.39)	77.0 (3.03)	26.0 (1.02)
100mm (4")	18.3 (0.72)	60.5 (2.32)	G - 3/8 (NPT 3/8)	30.0 (1.18)	12.0 (0.47)	94.0 (3.70)	26.0 (1.02)

Bore	J	K	L	M	N	O	P
12mm (1/2")	6.1 (0.24)	3.5 (0.14)	3.5 (0.14)	25.0 (0.98)	5.0 (0.19)	25.0 (0.98)	32.0 (1.26)
16mm (5/8")	6.5 (0.26)	3.5 (0.14)	3.5 (0.14)	29.0 (1.14)	6.0 (0.25)	29.0 (1.14)	38.0 (1.50)
20mm (3/4")	9.0 (0.35)	7.0 (0.28)	5.5 (0.22)	36.0 (1.42)	8.0 (0.31)	36.0 (1.42)	47.0 (1.85)
25mm (1")	9.0 (0.35)	7.0 (0.28)	5.5 (0.22)	40.0 (1.57)	10.0 (0.38)	40.0 (1.57)	52.0 (2.05)
32mm (1-1/4")	9.0 (0.35)	7.0 (0.28)	5.5 (0.22)	45.0 (1.77)	14.0 (0.56)	49.5 (1.95)	60.0 (2.36)
40mm (1-1/2")	9.0 (0.35)	7.0 (0.28)	5.5 (0.22)	52.0 (2.05)	14.0 (0.56)	57.0 (2.24)	69.0 (2.72)
50mm (2")	11.1 (0.44)	8.0 (0.31)	6.9 (0.27)	64.0 (2.52)	17.0 (0.69)	71.0 (2.80)	86.0 (3.39)
63mm (2-1/2")	14.1 (0.56)	10.5 (0.41)	8.8 (0.35)	77.0 (3.03)	17.0 (0.69)	84.0 (3.31)	103.0 (4.06)
80mm (3-1/4")	17.5 (0.69)	13.5 (0.53)	11.0 (0.43)	98.0 (3.86)	22.0 (0.88)	104.0 (4.09)	132.0 (5.20)
100mm (4")	17.5 (0.69)	13.5 (0.53)	11.0 (0.43)	117.0 (4.61)	27.0 (1.06)	123.5 (4.86)	156.0 (6.14)

Bore	Q	R	V
12mm (1/2")	5.3 (0.21)	M3 x 0.5 6H (#8-32 UNC-2B)	32.4 (1.27)
16mm (5/8")	7.8 (0.31)	M4 x 0.7 6H (#8-32 UNC-2B)	33.2 (1.31)
20mm (3/4")	10.5 (0.41)	M5 x 0.8 6H (#10-32 UNF-2B)	35.2 (1.39)
25mm (1")	11.5 (0.45)	M6 x 1.0 6H (1/4-28 UNF-2B)	39.2 (1.54)
32mm (1-1/4")	17.7 (0.70)	M8 x 1.25 6H (5/16-24 UNF-2B)	44.7 (1.76)
40mm (1-1/2")	24.5 (0.96)	M8 x 1.25 6H (3/8-24 UNF-2B)	54.2 (2.14)
50mm (2")	29.3 (1.16)	M10 x 1.5 6H (1/2-20 UNF-2B)	56.3 (2.22)
63mm (2-1/2")	29.1 (1.15)	M10 x 1.5 6H (1/2-20 UNF-2B)	57.8 (2.28)
80mm (3-1/4")	28.1 (1.11)	M16 x 2.0 6H (5/8-18 UNF-2B)	70.8 (2.79)
100mm (4")	32.3 (1.27)	M20 x 2.5 6H (3/4-16 UNF-2B)	84.3 (3.26)

*See page 205 for overall body length with MRS option.

When option E is specified, user interface threads are designated U.S. customary (inch). This includes ports, rod threads and threaded mounting options (as applicable).

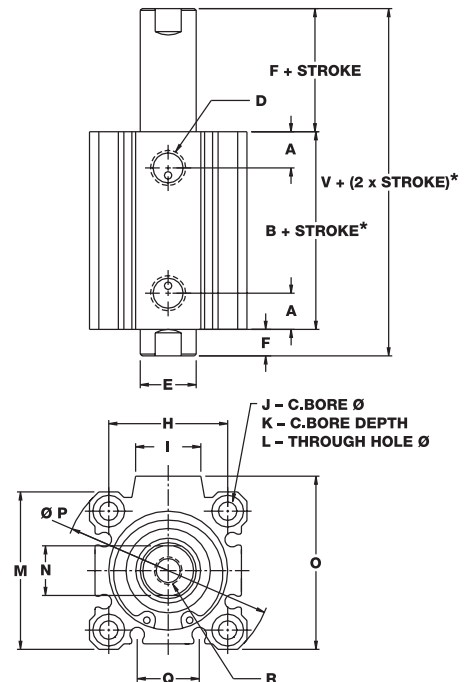


EF1 Cylinder Options and Dimensions (mm [in])


Spring Retract/Spring Extend

Bore	A	B	C	D	E	F
12mm (1/2")	3.8 (0.15)	17.0 (0.67)	8.9 (0.35)	M5 x 0.8 (#10-32)	6.0 (0.24)	3.5 (0.14)
16mm (5/8")	4.6 (0.18)	18.5 (0.73)	9.4 (0.37)	M5 x 0.8 (#10-32)	8.0 (0.31)	3.5 (0.14)
20mm (3/4")	4.8 (0.19)	19.5 (0.77)	9.4 (0.37)	M5 x 0.8 (#10-32)	10.0 (0.39)	4.5 (0.18)
25mm (1")	5.1 (0.20)	22.5 (0.89)	10.9 (0.43)	M5 x 0.8 (#10-32)	12.0 (0.47)	5.0 (0.20)
32mm (1-1/4")	7.1 (0.28)	23.0 (0.91)	10.4 (0.41)	G - 1/8 (NPT 1/8)	16.0 (0.63)	7.0 (0.28)
40mm (1-1/2")	7.4 (0.29)	29.5 (1.16)	13.2 (0.52)	G - 1/8 (NPT 1/8)	16.0 (0.63)	7.0 (0.28)
50mm (2")	9.4 (0.37)	30.5 (1.20)	13.7 (0.54)	G - 1/4 (NPT 1/4)	20.0 (0.79)	8.0 (0.31)
63mm (2-1/2")	9.7 (0.38)	36.0 (1.42)	15.7 (0.62)	G - 1/4 (NPT 1/4)	20.0 (0.79)	8.0 (0.31)
80mm (3-1/4")	11.7 (0.46)	43.5 (1.71)	17.8 (0.70)	G - 3/8 (NPT 3/8)	25.0 (0.98)	10.0 (0.39)

Spring Retract (Model EFS)

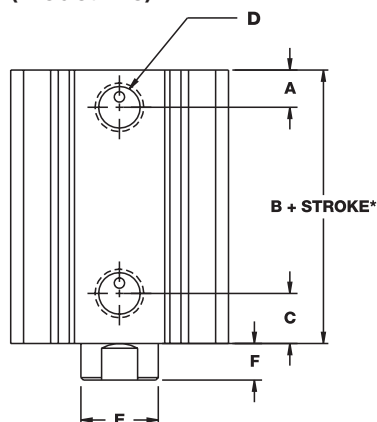

Spring Extend (Model EFR)

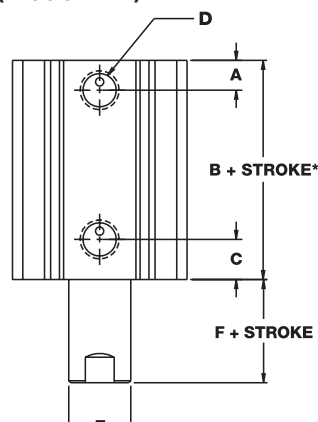

*See page 205 for overall body length with MRS option.

When option E is specified, user interface threads are designated U.S. customary (inch). This includes ports, rod threads and threaded mounting options (as applicable).

Weights

Bore	Approximate Base Weight of Cylinder gram-force (oz)	Weight Adder per 5mm of Stroke gram-force (oz)
12mm (1/2")	21.8 (0.77)	5.6 (0.20)
16mm (5/8")	38.7 (1.36)	8.0 (0.28)
20mm (3/4")	46.4 (1.64)	11.5 (0.41)
25mm (1")	73.1 (2.58)	14.6 (0.52)
32mm (1-1/4")	113.3 (4.00)	20.9 (0.74)
40mm (1-1/2")	181.4 (6.40)	21.3 (0.75)
50mm (2")	294.0 (10.37)	33.6 (1.19)
63mm (2-1/2")	484.5 (17.09)	40.7 (1.44)
80mm (3-1/4")	885.2 (31.23)	62.6 (2.21)
100mm (4")	1885.9 (66.52)	110.1 (3.89)


EF1 Cylinder Options and Dimensions (mm [in])

Mounting Options

Threaded Bottom Mount (-1) (EF1 models only)

Bore	H	T	U
12mm (1/2")	15.5 (0.61)	M4 x 0.7 6H (8-32 UNC-2B)	6.6 (0.26)
16mm (5/8")	20.0 (0.79)	M4 x 0.7 6H (8-32 UNC-2B)	6.6 (0.26)
20mm (3/4")	25.5 (1.00)	M6 x 1.0 6H (1/4-20 UNC-2B)	11.2 (0.44)
25mm (1")	28.0 (1.10)	M6 x 1.0 6H (1/4-20 UNC-2B)	11.2 (0.44)
32mm (1-1/4")	34.0 (1.34)	M6 x 1.0 6H (1/4-20 UNC-2B)	11.2 (0.44)
40mm (1-1/2")	40.0 (1.57)	M6 x 1.0 6H (1/4-20 UNC-2B)	11.2 (0.44)
50mm (2")	50.0 (1.97)	M8 x 1.25 6H (5/16-18 UNC-2B)	13.0 (0.51)
63mm (2-1/2")	60.0 (2.36)	M10 x 1.5 6H (7/16-14 UNC-2B)	16.8 (0.66)
80mm (3-1/4")	77.0 (3.03)	M12 x 1.75 6H (1/2-13 UNC-2B)	20.8 (0.82)
100mm (4")	94.0 (3.70)	M12 x 1.75 6H (1/2-13 UNC-2B)	20.8 (0.82)


NOTE: On the following models, only the front set of threaded bottom mounting holes is provided; EF-205, EF-2010, EF-255, EF-325, EF-8010.

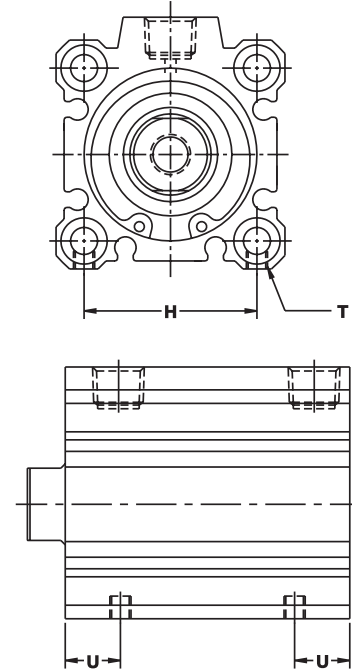

Threaded Front/Rear Mount (-3)

Bore	W	X	Y
12mm (1/2")	M4 x 0.7 (8-32 UNC)	10.5 (0.41)	7.0 (0.28)
16mm (5/8")	M4 x 0.7 (8-32 UNC)	10.5 (0.41)	7.0 (0.28)
20mm (3/4")	M6 x 1.0 (1/4-20 UNC)	17.0 (0.67)	10.0 (0.39)
25mm (1")	M6 x 1.0 (1/4-20 UNC)	17.0 (0.67)	10.0 (0.39)
32mm (1-1/4")	M6 x 1.0 (1/4-20 UNC)	17.0 (0.67)	10.0 (0.39)
40mm (1-1/2")	M6 x 1.0 (1/4-20 UNC)	17.0 (0.67)	10.0 (0.39)
50mm (2")	M8 x 1.25 (5/16-18 UNC)	22.0 (0.87)	14.0 (0.55)
63mm (2-1/2")	M10 x 1.5 (7/16-14 UNC)	28.5 (1.12)	18.0 (0.71)
80mm (3-1/4")	M12 x 1.75 (1/2-13 UNC)	35.6 (1.40)	22.0 (0.87)
100mm (4")	M12 x 1.75 (1/2-13 UNC)	35.6 (1.40)	22.0 (0.87)

NOTE: On EFT models, there are two threaded holes per end, not four.

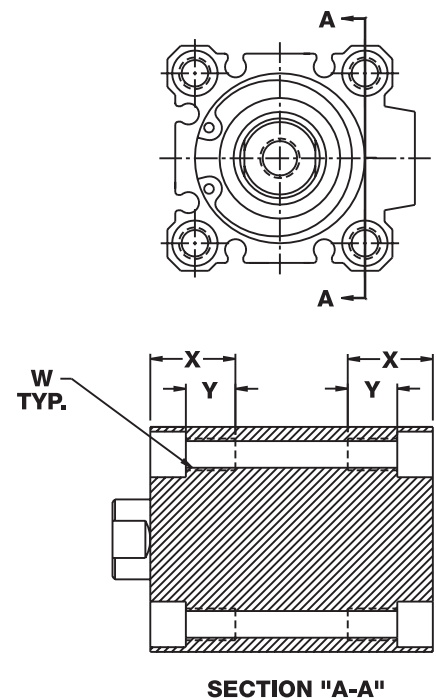


EF1 Cylinder Options and Dimensions (mm [in])

Options


Male Rod End (MT)

Bore	Standard			With Option E		
	AA	BB	F	AA	BB	F
12mm (1/2")	M5 x 0.80	10.5 (0.41)	14.0 (0.55)	#8-32 UNC	8.0 (0.31)	11.5 (0.45)
16mm (5/8")	M6 x 1.00	12.0 (0.47)	15.5 (0.61)	#8-32 UNC	8.0 (0.31)	11.5 (0.45)
20mm (3/4")	M8 x 1.25	14.0 (0.55)	18.5 (0.73)	#10-32 UNF	8.0 (0.31)	12.5 (0.49)
25mm (1")	M10 x 1.25	17.5 (0.69)	22.5 (0.89)	1/4-28 UNF	9.5 (0.37)	14.5 (0.57)
32mm (1-1/4")	M14 x 1.5	23.5 (0.93)	28.5 (1.12)	5/16-24 UNF	12.7 (0.50)	19.7 (0.78)
40mm (1-1/2")	M14 x 1.5	23.5 (0.93)	28.5 (1.12)	3/8-24 UNF	16.0 (0.63)	23.0 (0.91)
50mm (2")	M18 x 1.5	28.5 (1.12)	33.5 (1.32)	1/2-20 UNF	19.5 (0.77)	27.5 (1.08)
63mm (2-1/2")	M18 x 1.5	28.5 (1.12)	33.5 (1.32)	1/2-20 UNF	19.5 (0.77)	27.5 (1.08)
80mm (3-1/4")	M22 x 1.5	35.5 (1.40)	43.5 (1.71)	5/8-18 UNF	25.5 (1.00)	35.5 (1.40)
100mm (4")	M26 x 1.5	32.5 (1.28)	43.5 (1.71)	3/4-16 UNF	28.5 (1.12)	40.5 (1.59)




Rear Clevis Mount (6, 6N)

Stroke	A	B	C	D	E	F
12m	20 (0.79)	14 (0.55)	7 (0.28)	25 (0.98)	10 (0.39)	5 (0.21)
16m	21 (0.83)	15 (0.59)	10 (0.39)	29 (1.14)	12 (0.47)	7 (0.27)
20m	27 (1.06)	18 (0.71)	12 (0.47)	36 (1.41)	16 (0.62)	8 (0.33)
25m	30 (1.18)	20 (0.79)	14 (0.55)	40 (1.57)	20 (0.78)	10 (0.41)
32m	30 (1.18)	20 (0.79)	14 (0.55)	45 (1.77)	36 (1.41)	18 (0.72)
40m	32 (1.26)	22 (0.87)	14 (0.55)	52 (2.04)	36 (1.41)	18 (0.72)
50m	42 (1.65)	28 (1.10)	20 (0.79)	64 (2.52)	44 (1.72)	22 (0.87)
63m	44 (1.73)	30 (1.18)	20 (0.79)	77 (3.03)	44 (1.72)	22 (0.87)
80m	56 (2.21)	38 (1.50)	27 (1.06)	98 (3.85)	56 (2.20)	28 (1.11)
100m	67 (2.64)	45 (1.77)	31 (1.22)	117 (4.60)	64 (2.51)	32 (1.27)



Bore	G	H Ø (PIN)	I	J
12mm	13 (0.51)	5 (0.197)	M4x0.7 (#8-32 UNC)	15.5 (0.61)
16mm	15 (0.58)	5 (0.197)	M4x0.7 (#8-32 UNC)	20 (0.79)
20mm	21 (0.82)	8 (0.315)	M6x1.0 (1/4-20 UNC)	25.5 (1.00)
25mm	22 (0.85)	10 (0.394)	M6x1.0 (1/4-20 UNC)	28 (1.10)
32mm	39 (1.53)	10 (0.394)	M6x1.0 (1/4-20 UNC)	34 (1.34)
40mm	39 (1.53)	10 (0.394)	M6x1.0 (1/4-20 UNC)	40 (1.58)
50mm	49 (1.91)	14 (0.551)	M8x1.25 (5/16-18 UNC)	50 (1.97)
63mm	49 (1.91)	14 (0.551)	M10x1.5 (7/16-14 UNC)	60 (2.36)
80mm	62 (2.44)	18 (0.709)	M12x1.75 (1/2-13 UNC)	77 (3.03)
100mm	72 (2.84)	22 (0.866)	M12x1.75 (1/2-13 UNC)	94 (3.70)

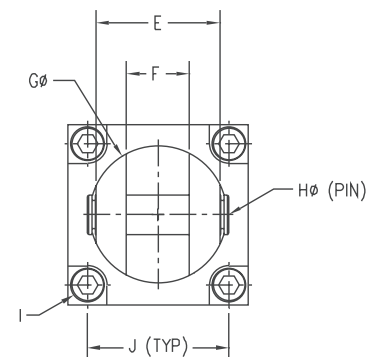


EF1 Cylinder Options and Dimensions (mm [in])

Options

Magnetic Position Sensing (M)

(Body Lengths With MRS Option)

Bore	B	
	Double Acting Single Rod	Double Acting Double Rod
12mm (1/2")	27.0 (1.06)	32.4 (1.28)
16mm (5/8")	28.5 (1.12)	36.0 (1.42)
20mm (3/4")	29.5 (1.16)	36.0 (1.42)
25mm (1")	32.5 (1.28)	39.0 (1.54)
32mm (1-1/4")	33.0 (1.30)	40.5 (1.59)
40mm (1-1/2")	39.5 (1.56)	50.0 (1.97)
50mm (2")	40.5 (1.59)	50.5 (1.99)
63mm (2-1/2")	46.0 (1.81)	52.0 (2.05)
80mm (3-1/4")	53.5 (2.11)	61.0 (2.40)
100mm (4")	63.0 (2.48)	70.5 (2.78)

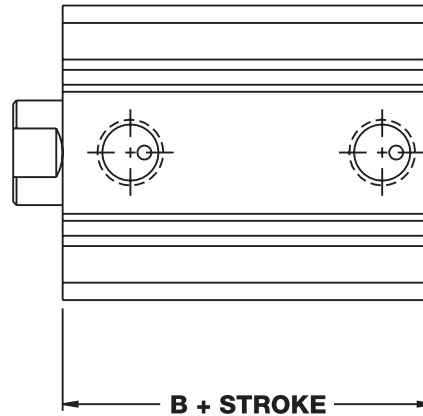

Bumpers

(Stroke reduction by model for all bores)

Model	Stroke Reduction mm (in)
Double Acting Single Rod End	3.0 (.12)
Double Acting Double Rod End	
Single Acting Spring Retract	1.5 (.06)
Reverse Acting Spring Extend	

EF2 Cylinder Stroke Length Availability

Bimba is a JIT manufacturer and we are able to provide EFT model cylinders in ANY 1mm or stroke length increment for all option styles within our standard three-day lead time. Longer stroke lengths are also available upon request at standard lead times. Please consult Technical Assistance at 800-44-BIMBA for help.

Nominal Bore Diameter	EFT Single Rod End (mm)
12mm (1/2")	5, 10, 15, 20, 25, 30
16mm (5/8")	5, 10, 15, 20, 25, 30
20mm (3/4")	5, 10, 15, 20, 25, 30, 35, 40, 45, 50
25mm (1")	5, 10, 15, 20, 25, 30, 35, 40, 45, 50
32mm (1-1/4")	5, 10, 15, 20, 25, 30, 35, 40, 45, 50, 75, 100
40mm (1-1/2")	5, 10, 15, 20, 25, 30, 35, 40, 45, 50, 75, 100
50mm (2")	10, 15, 20, 25, 30, 35, 40, 45, 50, 75, 100
63mm (2-1/2")	10, 15, 20, 25, 30, 35, 40, 45, 50, 75, 100
80mm (3-1/4")	10, 15, 20, 25, 30, 35, 40, 45, 50, 75, 100
100mm (4")	10, 15, 20, 25, 30, 35, 40, 45, 50, 75, 100


EF2 Cylinder Options and Dimensions

EFT Cylinders

Maximum Side Loads kg-Force (lb)

Bore	Stroke Length						
	5mm	10mm	15mm	20mm	25mm	30mm	35mm
12mm (1/2")	1.79 (3.94)	1.47 (3.24)	1.25 (2.75)	1.08 (2.39)	0.96 (2.11)	0.86 (1.89)	N/A
16mm (5/8")	2.60 (5.72)	2.16 (4.76)	1.85 (4.08)	1.62 (3.57)	1.44 (3.17)	1.30 (2.86)	N/A
20mm (3/4")	5.09 (11.23)	4.36 (9.62)	3.82 (8.42)	3.39 (7.48)	3.06 (6.74)	2.78 (6.13)	2.55 (5.62)
25mm (1")	5.22 (11.50)	4.48 (9.88)	3.93 (8.66)	3.50 (7.71)	3.15 (6.94)	2.86 (6.32)	2.63 (5.80)
32mm (1-1/4")	5.54 (12.22)	4.80 (10.59)	4.24 (9.35)	3.80 (8.37)	3.44 (7.58)	3.14 (6.91)	2.89 (6.36)
40mm (1-1/2")	6.53 (14.40)	5.69 (12.55)	5.04 (11.12)	4.53 (9.98)	4.11 (9.06)	3.76 (8.28)	3.47 (7.64)
50mm (2")	N/A	8.94 (19.71)	8.03 (17.71)	7.30 (16.09)	6.68 (14.74)	6.17 (13.60)	5.73 (12.62)
63mm (2-1/2")	N/A	14.49 (31.95)	13.16 (29.01)	12.06 (26.58)	11.12 (24.51)	10.32 (22.76)	9.63 (21.23)
80mm (3-1/4")	N/A	23.59 (52.02)	21.70 (47.85)	20.09 (44.30)	18.71 (41.24)	17.50 (38.58)	16.43 (36.23)
100mm (4")	N/A	26.22 (57.80)	24.24 (53.45)	22.55 (49.71)	21.07 (46.46)	19.78 (43.61)	18.64 (41.08)

Bore	Stroke Length				
	40mm	45mm	50mm	75mm	100mm
12mm (1/2")	N/A	N/A	N/A	N/A	N/A
16mm (5/8")	N/A	N/A	N/A	N/A	N/A
20mm (3/4")	2.35 (5.19)	2.19 (4.82)	2.04 (4.50)	N/A	N/A
25mm (1")	2.43 (5.35)	2.26 (4.98)	2.11 (4.64)	N/A	N/A
32mm (1-1/4")	2.68 (5.90)	2.49 (5.48)	2.33 (5.13)	1.76 (3.89)	1.42 (3.13)
40mm (1-1/2")	3.22 (7.09)	3.00 (6.60)	2.80 (6.18)	2.13 (4.70)	1.72 (3.79)
50mm (2")	5.34 (11.78)	5.01 (11.03)	4.71 (10.39)	3.64 (8.02)	2.96 (6.53)
63mm (2-1/2")	9.03 (19.90)	8.49 (18.72)	8.02 (17.67)	6.27 (13.82)	5.15 (11.35)
80mm (3-1/4")	15.49 (34.16)	14.66 (32.32)	13.91 (30.66)	11.07 (24.40)	9.19 (20.27)
100mm (4")	17.61 (38.83)	16.70 (36.82)	15.88 (35.00)	12.74 (28.08)	10.63 (23.44)



Maximum Moments N-m (in-lb)


Bore	Stroke Length						
	5mm	10mm	15mm	20mm	25mm	30mm	35mm
12mm (1/2")	0.08 (0.72)	0.07 (0.59)	0.06 (0.50)	0.05 (0.44)	0.04 (0.39)	0.04 (0.35)	N/A
16mm (5/8")	0.16 (1.39)	0.13 (1.16)	0.11 (1.00)	0.10 (0.87)	0.09 (0.78)	0.08 (0.70)	N/A
20mm (3/4")	0.42 (3.72)	0.36 (3.20)	0.32 (2.81)	0.28 (2.50)	0.25 (2.25)	0.23 (2.05)	0.21 (1.88)
25mm (1")	0.45 (4.02)	0.39 (3.46)	0.34 (3.04)	0.31 (2.71)	0.28 (2.45)	0.25 (2.23)	0.23 (2.05)
32mm (1-1/4")	0.50 (4.45)	0.44 (3.88)	0.39 (3.44)	0.35 (3.09)	0.32 (2.81)	0.29 (2.57)	0.27 (2.37)
40mm (1-1/2")	0.59 (5.24)	0.52 (4.57)	0.46 (4.05)	0.41 (3.64)	0.37 (3.31)	0.34 (3.03)	0.32 (2.79)
50mm (2")	N/A	1.13 (10.04)	1.02 (9.06)	0.93 (8.26)	0.86 (7.59)	0.79 (7.02)	0.74 (6.53)
63mm (2-1/2")	N/A	2.35 (20.84)	2.15 (18.99)	1.97 (17.44)	1.82 (16.13)	1.69 (15.00)	1.58 (14.01)
80mm (3-1/4")	N/A	4.72 (41.75)	4.35 (38.51)	4.04 (35.75)	3.77 (33.35)	3.53 (31.25)	3.32 (29.41)
100mm (4")	N/A	5.57 (49.33)	5.16 (45.63)	4.79 (42.44)	4.48 (39.67)	4.21 (37.24)	3.96 (35.09)

EF2 Cylinder Options and Dimensions

EFT Cylinders


Maximum Moments N-m (in-lb)

Bore	Stroke Length				
	40mm	45mm	50mm	75mm	100mm
12mm (1/2")	N/A	N/A	N/A	N/A	N/A
16mm (5/8")	N/A	N/A	N/A	N/A	N/A
20mm (3/4")	0.20 (1.74)	0.18 (1.62)	0.17 (1.51)	N/A	N/A
25mm (1")	0.21 (1.89)	0.20 (1.76)	0.19 (1.64)	N/A	N/A
32mm (1-1/4")	0.25 (2.20)	0.23 (2.05)	0.22 (1.92)	0.16 (1.46)	0.13 (1.18)
40mm (1-1/2")	0.29 (2.59)	0.27 (2.41)	0.26 (2.26)	0.19 (1.72)	0.16 (1.39)
50mm (2")	0.69 (6.11)	0.65 (5.73)	0.61 (5.40)	0.47 (4.19)	0.39 (3.42)
63mm (2-1/2")	1.49 (13.15)	1.40 (12.39)	1.32 (11.71)	1.04 (9.19)	0.85 (7.57)
80mm (3-1/4")	3.14 (27.77)	2.97 (26.30)	2.82 (24.98)	2.26 (19.96)	1.88 (16.63)
100mm (4")	3.75 (33.17)	3.55 (31.45)	3.38 (29.90)	2.71 (24.00)	2.26 (20.04)

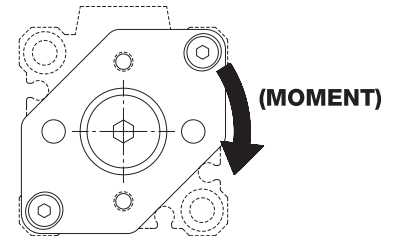

Tooling Plate End Play mm (in)

Bore	Stroke Length						
	5mm	10mm	15mm	20mm	25mm	30mm	35mm
12mm (1/2")	0.17 (.007)	0.21 (.008)	0.25 (.010)	0.29 (.012)	0.34 (.013)	0.38 (.015)	N/A
16mm (5/8")	0.18 (.007)	0.23 (.009)	0.27 (.011)	0.32 (.012)	0.36 (.014)	0.41 (.016)	N/A
20mm (3/4")	0.15 (.006)	0.18 (.007)	0.20 (.008)	0.23 (.009)	0.26 (.010)	0.29 (.011)	0.32 (.013)
25mm (1")	0.16 (.006)	0.19 (.007)	0.22 (.008)	0.24 (.010)	0.27 (.011)	0.30 (.012)	0.33 (.013)
32mm (1-1/4")	0.17 (.007)	0.20 (.008)	0.23 (.009)	0.26 (.010)	0.28 (.011)	0.31 (.012)	0.34 (.013)
40mm (1-1/2")	0.17 (.007)	0.20 (.008)	0.23 (.009)	0.26 (.010)	0.28 (.011)	0.31 (.012)	0.34 (.013)
50mm (2")	N/A	0.26 (.010)	0.30 (.012)	0.33 (.013)	0.36 (.014)	0.40 (.016)	0.43 (.017)
63mm (2-1/2")	N/A	0.18 (.007)	0.20 (.008)	0.22 (.009)	0.24 (.010)	0.26 (.010)	0.28 (.011)
80mm (3-1/4")	N/A	0.20 (.008)	0.23 (.009)	0.25 (.010)	0.27 (.011)	0.29 (.011)	0.31 (.012)
100mm (4")	N/A	0.21 (.008)	0.23 (.009)	0.26 (.010)	0.28 (.011)	0.30 (.012)	0.32 (.013)



Bore	Stroke Length				
	40mm	45mm	50mm	75mm	100mm
12mm (1/2")	N/A	N/A	N/A	N/A	N/A
16mm (5/8")	N/A	N/A	N/A	N/A	N/A
20mm (3/4")	0.35 (.014)	0.38 (.015)	0.40 (.016)	N/A	N/A
25mm (1")	0.36 (.014)	0.39 (.015)	0.42 (.016)	N/A	N/A
32mm (1-1/4")	0.37 (.015)	0.40 (.016)	0.43 (.017)	0.57 (.022)	0.71 (.028)
40mm (1-1/2")	0.37 (.015)	0.40 (.016)	0.43 (.017)	0.57 (.022)	0.71 (.028)
50mm (2")	0.46 (.018)	0.50 (.020)	0.53 (.021)	0.70 (.027)	0.86 (.034)
63mm (2-1/2")	0.30 (.012)	0.32 (.013)	0.35 (.014)	0.45 (.018)	0.55 (.022)
80mm (3-1/4")	0.33 (.013)	0.36 (.014)	0.38 (.015)	0.49 (.019)	0.60 (.023)
100mm (4")	0.34 (.014)	0.36 (.014)	0.39 (.015)	0.50 (.020)	0.61 (.024)


EF2 Cylinder Options and Dimensions

EFT Cylinders with X Option

Maximum Side Loads kg-Force (lb)

Bore	Stroke Length						
	5mm	10mm	15mm	20mm	25mm	30mm	35mm
12mm (1/2")	N/A	2.99 (6.58)	2.85 (6.28)	2.76 (6.07)	2.69 (5.92)	2.63 (5.80)	N/A
16mm (5/8")	N/A	4.21 (9.27)	4.02 (8.84)	3.88 (8.54)	3.78 (8.32)	3.70 (8.15)	N/A
20mm (3/4")	N/A	8.13 (17.90)	7.84 (17.25)	7.63 (16.79)	7.47 (16.45)	7.35 (16.18)	7.26 (15.97)
25mm (1")	N/A	8.52 (18.76)	8.18 (18.01)	7.94 (17.47)	7.75 (17.06)	7.60 (16.74)	7.49 (16.48)
32mm (1-1/4")	N/A	8.75 (19.27)	8.42 (18.53)	8.16 (17.97)	7.96 (17.53)	7.80 (17.18)	7.68 (16.90)
40mm (1-1/2")	N/A	10.18 (22.40)	9.69 (21.34)	9.32 (20.52)	9.03 (19.87)	8.78 (19.33)	8.58 (18.89)
50mm (2")	N/A	15.11 (33.26)	14.49 (31.90)	14.01 (30.84)	13.63 (30.00)	13.31 (29.30)	13.05 (28.72)
63mm (2-1/2")	N/A	24.31 (53.50)	23.36 (51.41)	22.61 (49.76)	22.00 (48.42)	21.50 (47.32)	21.07 (46.38)
80mm (3-1/4")	N/A	38.19 (84.06)	36.78 (80.96)	35.64 (78.44)	34.68 (76.34)	33.76 (74.32)	33.19 (73.06)
100mm (4")	N/A	42.40 (93.34)	40.83 (89.88)	39.52 (86.98)	38.39 (84.51)	37.43 (82.38)	36.58 (80.53)

Bore	Stroke Length				
	40mm	45mm	50mm	75mm	100mm
12mm (1/2")	N/A	N/A	N/A	N/A	N/A
16mm (5/8")	N/A	N/A	N/A	N/A	N/A
20mm (3/4")	7.17 (15.79)	7.11 (15.65)	7.05 (15.52)	N/A	N/A
25mm (1")	7.39 (16.27)	7.31 (16.09)	7.24 (15.94)	N/A	N/A
32mm (1-1/4")	7.57 (16.66)	7.48 (16.46)	7.40 (16.29)	7.14 (15.71)	6.98 (15.36)
40mm (1-1/2")	8.41 (18.52)	8.27 (18.20)	8.14 (17.92)	7.70 (16.96)	7.44 (16.38)
50mm (2")	12.82 (28.23)	12.63 (27.81)	12.47 (27.44)	11.88 (26.16)	11.53 (25.39)
63mm (2-1/2")	20.71 (45.59)	20.40 (44.90)	20.13 (44.30)	19.16 (42.18)	18.57 (40.88)
80mm (3-1/4")	32.60 (71.75)	32.07 (70.60)	31.61 (69.59)	29.95 (65.92)	28.90 (63.61)
100mm (4")	35.84 (78.90)	35.19 (77.46)	34.61 (76.18)	32.43 (71.38)	31.01 (68.26)



Maximum Moments N-m (in-lb)


Bore	Stroke Length						
	5mm	10mm	15mm	20mm	25mm	30mm	35mm
12mm (1/2")	N/A	0.15 (1.31)	0.14 (1.27)	0.14 (1.23)	0.13 (1.21)	0.13 (1.19)	N/A
16mm (5/8")	N/A	0.27 (2.42)	0.26 (2.32)	0.25 (2.26)	0.25 (2.21)	0.24 (2.18)	N/A
20mm (3/4")	N/A	0.68 (6.14)	0.66 (5.94)	0.64 (5.80)	0.63 (5.70)	0.62 (5.62)	0.62 (5.56)
25mm (1")	N/A	0.77 (6.93)	0.74 (6.70)	0.72 (6.53)	0.71 (6.40)	0.70 (6.30)	0.69 (6.22)
32mm (1-1/4")	N/A	0.89 (7.99)	0.86 (7.79)	0.85 (7.63)	0.83 (7.52)	0.82 (7.43)	0.82 (7.35)
40mm (1-1/2")	N/A	1.11 (10.02)	1.08 (9.71)	1.05 (9.48)	1.03 (9.29)	1.02 (9.15)	1.00 (9.03)
50mm (2")	N/A	2.16 (19.48)	2.10 (18.95)	2.06 (18.54)	2.02 (18.22)	1.99 (17.96)	1.97 (17.75)
63mm (2-1/2")	N/A	4.31 (38.84)	4.18 (37.70)	4.08 (36.80)	4.01 (36.09)	3.94 (35.51)	3.89 (35.02)
80mm (3-1/4")	N/A	8.44 (76.07)	8.21 (73.99)	8.03 (72.32)	7.88 (70.96)	7.75 (69.82)	7.64 (68.86)
100mm (4")	N/A	10.63 (95.78)	10.35 (93.25)	10.12 (91.16)	9.93 (89.42)	9.76 (87.94)	9.62 (86.67)

EF2 Cylinder Options and Dimensions

EFT Cylinders with X Option


Maximum Moments N-m (in-lb)

Bore	Stroke Length				
	40mm	45mm	50mm	75mm	100mm
12mm (1/2")	N/A	N/A	N/A	N/A	N/A
16mm (5/8")	N/A	N/A	N/A	N/A	N/A
20mm (3/4")	0.61 (5.50)	0.61 (5.46)	0.60 (5.42)	N/A	N/A
25mm (1")	0.68 (6.15)	0.68 (6.10)	0.67 (6.05)	N/A	N/A
32mm (1-1/4")	0.81 (7.29)	0.80 (7.24)	0.80 (7.20)	0.76 (6.84)	0.75 (6.77)
40mm (1-1/2")	0.99 (8.93)	0.98 (8.84)	0.97 (8.77)	0.90 (8.15)	0.89 (8.02)
50mm (2")	1.95 (17.57)	1.93 (17.42)	1.92 (17.28)	1.79 (16.16)	1.77 (15.91)
63mm (2-1/2")	3.84 (34.61)	3.80 (34.25)	3.77 (33.95)	3.47 (31.26)	3.40 (30.64)
80mm (3-1/4")	7.55 (68.03)	7.47 (67.32)	7.40 (66.69)	6.77 (60.95)	6.61 (59.55)
100mm (4")	9.50 (85.57)	9.39 (84.60)	9.30 (83.75)	8.95 (80.63)	8.73 (78.66)

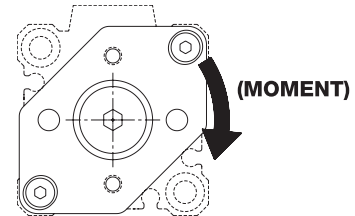


Tooling Plate End Play mm (in)

Bore	Stroke Length						
	5mm	10mm	15mm	20mm	25mm	30mm	35mm
12mm (1/2")	N/A	0.10 (.004)	0.08 (.003)	0.08 (.003)	0.05 (.002)	0.05 (.002)	N/A
16mm (5/8")	N/A	0.10 (.004)	0.08 (.003)	0.08 (.003)	0.08 (.003)	0.05 (.002)	N/A
20mm (3/4")	N/A	0.10 (.004)	0.08 (.003)	0.08 (.003)	0.05 (.002)	0.05 (.002)	0.05 (.002)
25mm (1")	N/A	0.08 (.003)	0.08 (.003)	0.08 (.003)	0.05 (.002)	0.05 (.002)	0.05 (.002)
32mm (1-1/4")	N/A	0.08 (.003)	0.08 (.003)	0.05 (.002)	0.05 (.002)	0.05 (.002)	0.05 (.002)
40mm (1-1/2")	N/A	0.08 (.003)	0.05 (.002)	0.05 (.002)	0.05 (.002)	0.05 (.002)	0.05 (.002)
50mm (2")	N/A	0.08 (.003)	0.08 (.003)	0.05 (.002)	0.05 (.002)	0.05 (.002)	0.05 (.002)
63mm (2-1/2")	N/A	0.05 (.002)	0.05 (.002)	0.05 (.002)	0.05 (.002)	0.05 (.002)	0.03 (.001)
80mm (3-1/4")	N/A	0.05 (.002)	0.05 (.002)	0.05 (.002)	0.05 (.002)	0.03 (.001)	0.03 (.001)
100mm (4")	N/A	0.05 (.002)	0.05 (.002)	0.03 (.001)	0.03 (.001)	0.03 (.001)	0.03 (.001)



Bore	Stroke Length				
	40mm	45mm	50mm	75mm	100mm
12mm (1/2")	N/A	N/A	N/A	N/A	N/A
16mm (5/8")	N/A	N/A	N/A	N/A	N/A
20mm (3/4")	0.05 (.002)	0.05 (.002)	0.05 (.002)	N/A	N/A
25mm (1")	0.05 (.002)	0.05 (.002)	0.03 (.001)	N/A	N/A
32mm (1-1/4")	0.05 (.002)	0.05 (.002)	0.03 (.001)	0.03 (.001)	0.03 (.001)
40mm (1-1/2")	0.05 (.002)	0.03 (.001)	0.03 (.001)	0.03 (.001)	0.13 (.005)
50mm (2")	0.05 (.002)	0.05 (.002)	0.05 (.002)	0.03 (.001)	0.13 (.005)
63mm (2-1/2")	0.03 (.001)	0.03 (.001)	0.03 (.001)	0.03 (.001)	0.13 (.005)
80mm (3-1/4")	0.03 (.001)	0.03 (.001)	0.03 (.001)	0.03 (.001)	0.13 (.005)
100mm (4")	0.03 (.001)	0.03 (.001)	0.03 (.001)	0.03 (.001)	0.13 (.005)

EF2 Cylinder Options and Dimensions (mm [in])

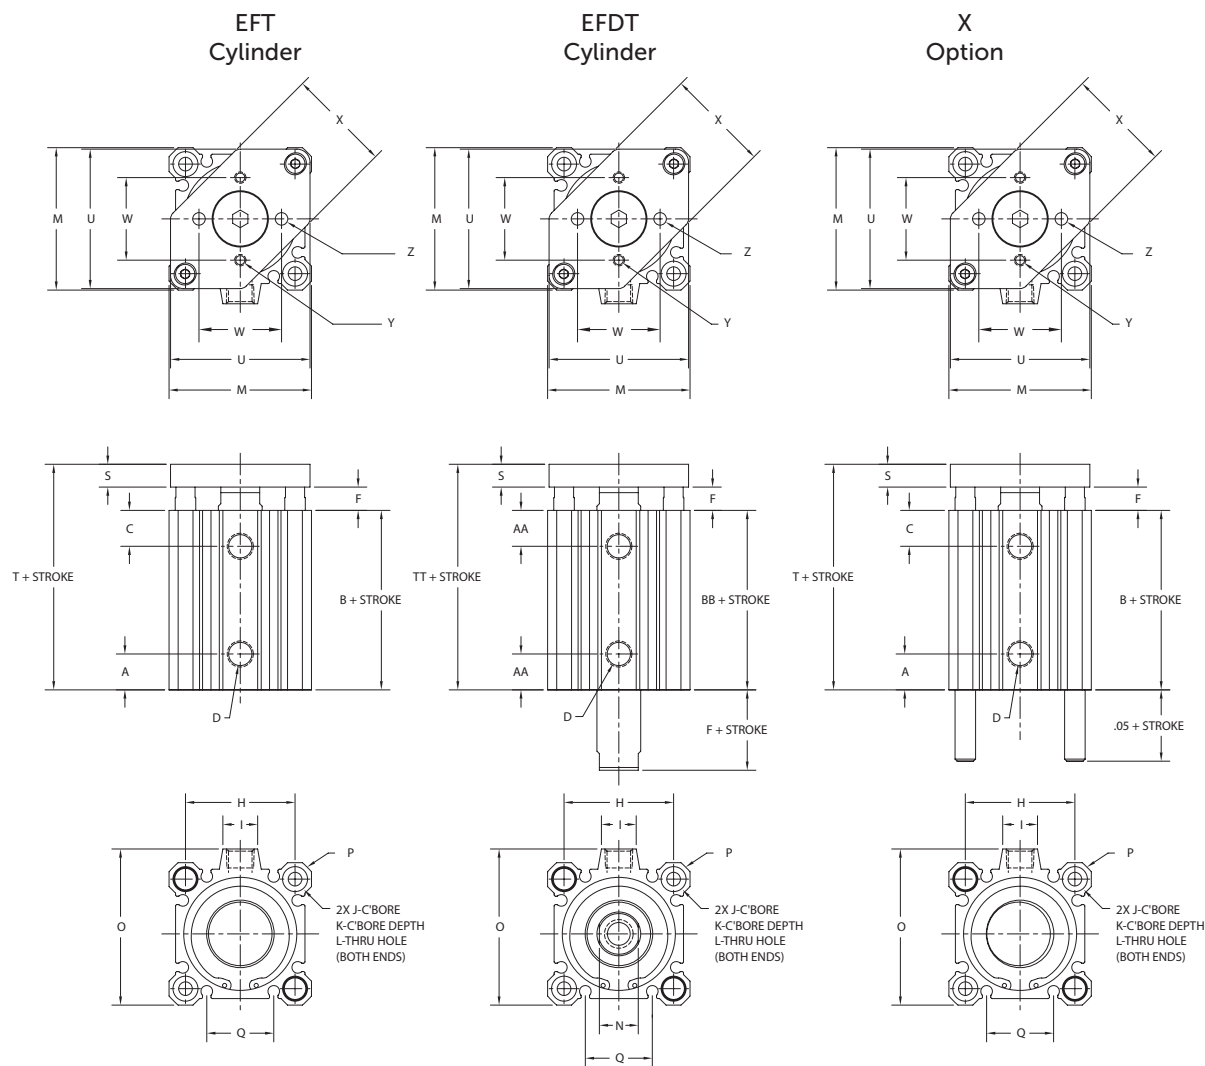

Double Acting/Non-Rotating

Bore	A	AA	B	BB	C	D	F	H	I	J
12mm (1/2")	3.8 (0.15)	10.6 (0.42)	17.0 (0.67)	25.2 (0.99)	8.9 (0.35)	M5 x 0.8 (#10-32)	3.5 (0.14)	15.5 (0.61)	N/A	6.1 (0.24)
16mm (5/8")	4.5 (0.18)	10.7 (0.42)	18.5 (0.73)	26.0 (1.03)	9.4 (0.37)	M5 x 0.8 (#10-32)	3.5 (0.14)	20.0 (0.79)	8.7 (0.34)	6.5 (0.26)
20mm (3/4")	4.8 (0.19)	10.1 (0.40)	19.5 (0.77)	26.0 (1.03)	9.4 (0.37)	M5 x 0.8 (#10-32)	4.5 (0.18)	25.5 (1.00)	9.5 (0.38)	9.0 (0.36)
25mm (1")	5.1 (0.20)	11.2 (0.44)	22.5 (0.89)	29.0 (1.14)	10.9 (0.43)	M5 x 0.8 (#10-32)	5.0 (0.20)	28.0 (1.10)	10.3 (0.41)	9.0 (0.36)
32mm (1-1/4")	7.0 (0.28)	8.9 (0.35)	23.0 (0.91)	30.5 (1.20)	10.4 (0.41)	G - 1/8 (NPT 1/8)	7.0 (0.28)	34.0 (1.34)	18.6 (0.73)	9.0 (0.36)
40mm (1-1/2")	7.4 (0.29)	13.1 (0.52)	29.5 (1.16)	40.0 (1.58)	13.2 (0.52)	G - 1/8 (NPT 1/8)	7.0 (0.28)	40.0 (1.58)	17.3 (0.68)	9.0 (0.36)
50mm (2")	9.4 (0.37)	12.2 (0.48)	30.5 (1.20)	40.5 (1.60)	13.7 (0.54)	G - 1/4 (NPT 1/4)	8.0 (0.32)	50.0 (1.97)	20.0 (0.79)	11.1 (0.44)
63mm (2-1/2")	9.7 (0.38)	12.8 (0.50)	36.0 (1.42)	42.0 (1.66)	15.7 (0.62)	G - 1/4 (NPT 1/4)	8.0 (0.32)	60.0 (2.36)	20.0 (0.79)	14.1 (0.56)
80mm (3-1/4")	11.6 (0.46)	14.4 (0.57)	43.5 (1.71)	51.0 (2.01)	17.8 (0.70)	G - 3/8 (NPT 3/8)	10.0 (0.39)	77.0 (3.03)	26.0 (1.02)	17.5 (0.69)
100mm (4")	12.2 (0.48)	18.3 (0.72)	53.0 (2.09)	60.5 (2.32)	24.4 (0.96)	G - 3/8 (NPT 3/8)	12.0 (0.47)	94.0 (3.70)	26.0 (1.02)	17.5 (0.69)

EF2 Cylinder Options and Dimensions (mm [in])

Bore	K	L	M	N	O	P	Q	S
12mm (1/2")	3.5 (0.14)	3.5 (0.14)	25.0 (0.98)	5.0 (0.19)	25.0 (0.98)	32.0 (1.26)	5.3 (0.21)	6.0 (0.24)
16mm (5/8")	3.5 (0.14)	3.5 (0.14)	29.0 (1.14)	6.0 (0.25)	29.0 (1.14)	38.0 (1.50)	7.8 (0.31)	6.0 (0.24)
20mm (3/4")	7.0 (0.28)	5.5 (0.22)	36.0 (1.42)	8.0 (0.31)	36.0 (1.42)	47.0 (1.85)	10.5 (0.41)	6.9 (0.27)
25mm (1")	7.0 (0.28)	5.5 (0.22)	40.0 (1.58)	10.0 (0.38)	40.0 (1.58)	52.0 (2.05)	11.5 (0.45)	8.3 (0.33)
32mm (1-1/4")	7.0 (0.28)	5.5 (0.22)	45.0 (1.77)	14.0 (0.56)	49.5 (1.95)	60.0 (2.36)	17.7 (0.70)	8.3 (0.33)
40mm (1-1/2")	7.0 (0.28)	5.5 (0.22)	52.0 (2.05)	14.0 (0.56)	57.0 (2.24)	69.0 (2.72)	24.5 (0.96)	8.3 (0.33)
50mm (2")	8.0 (0.31)	6.9 (0.27)	64.0 (2.52)	17.0 (0.69)	71.0 (2.80)	86.0 (3.39)	29.3 (1.16)	12.1 (0.48)
63mm (2-1/2")	10.5 (0.41)	8.8 (0.35)	77.0 (3.03)	17.0 (0.69)	84.0 (3.31)	103.0 (4.06)	29.1 (1.15)	12.5 (0.49)
80mm (3-1/4")	13.5 (0.53)	11.0 (0.43)	98.0 (3.86)	22.0 (0.88)	104.0 (4.09)	132.0 (5.20)	28.1 (1.11)	14.0 (0.55)
100mm (4")	13.5 (0.53)	11.0 (0.43)	117.0 (4.61)	27.0 (1.06)	123.5 (4.86)	156.0 (6.14)	32.3 (1.27)	14.0 (0.55)

Bore	T	TT	U	W	X	Y		Z	
						Standard	With Option E	Standard	With Option E
12mm (1/2")	26.5 (1.04)	34.7 (1.37)	24.3 (0.96)	14.0 (0.55)	20.8 (0.82)	M3 x 0.5 6H	#4-40 UNC-2B	4.1 (0.16)	3.6 (0.14)
16mm (5/8")	28.0 (1.10)	35.5 (1.40)	28.0 (1.10)	20.0 (0.79)	25.0 (0.98)	M3 x 0.5 6H	#4-40 UNC-2B	4.1 (0.16)	3.6 (0.14)
20mm (3/4")	30.8 (1.21)	37.4 (1.47)	35.0 (1.38)	27.0 (1.06)	26.5 (1.04)	M4 x 0.7 6H	#6-32 UNC-2B	5.2 (0.20)	4.3 (0.17)
25mm (1")	35.8 (1.41)	42.3 (1.67)	39.0 (1.54)	27.0 (1.06)	30.0 (1.18)	M4 x 0.7 6H	#6-32 UNC-2B	5.2 (0.20)	4.3 (0.17)
32mm (1-1/4")	38.3 (1.52)	45.8 (1.80)	44.0 (1.73)	30.0 (1.18)	34.3 (1.35)	M4 x 0.7 6H	#8-32 UNC-2B	5.2 (0.20)	4.7 (0.18)
40mm (1-1/2")	44.8 (1.76)	55.3 (2.18)	51.0 (2.01)	30.0 (1.18)	38.0 (1.50)	M4 x 0.7 6H	#8-32 UNC-2B	5.2 (0.20)	4.7 (0.18)
50mm (2")	50.6 (1.99)	60.6 (2.39)	63.0 (2.48)	42.8 (1.69)	48.0 (1.89)	M5 x 0.8 6H	#10-32 UNF-2B	6.4 (0.25)	5.6 (0.22)
63mm (2-1/2")	56.5 (2.22)	62.5 (2.46)	75.8 (2.98)	42.8 (1.69)	53.7 (2.11)	M5 x 0.8 6H	#10-32 UNF-2B	6.4 (0.25)	5.6 (0.22)
80mm (3-1/4")	67.5 (2.66)	75.0 (2.95)	97.0 (3.82)	50.8 (2.00)	74.8 (2.94)	M6 x 1.0 6H	#1/4-20 UNC-2B	7.1 (0.28)	7.2 (0.29)
100mm (4")	79.0 (3.11)	86.5 (3.41)	115.5 (4.55)	50.8 (2.00)	93.3 (3.67)	M6 x 1.0 6H	#1/4-20 UNC-2B	7.1 (0.28)	7.2 (0.29)

*See page 212 for overall body length with MRS option.

When option E is specified, user interface threads are designated U.S. customary (inch). This includes ports, rod threads and threaded mounting options (as applicable).

EF2 Cylinder Options and Dimensions

Weights

Bore	Approximate Base Weight of Cylinder gram-force (oz)	Weight Adder per 5mm of Stroke gram-force (oz)
12mm (1/2")	32.3 (1.14)	6.1 (0.22)
16mm (5/8")	53.4 (1.89)	8.6 (0.30)
20mm (3/4")	74.4 (2.62)	13.3 (0.47)
25mm (1")	114.6 (4.04)	16.3 (0.58)
32mm (1-1/4")	166.9 (5.89)	22.6 (0.80)
40mm (1-1/2")	250.7 (8.84)	23.0 (0.81)
50mm (2")	440.4 (15.53)	35.8 (1.26)
63mm (2-1/2")	697.3 (24.60)	45.2 (1.59)
80mm (3-1/4")	1309.6 (46.20)	70.0 (2.47)
100mm (4")	2464.6 (86.94)	117.5 (4.15)


Options

Magnetic Position Sensing (M)

(Overall Length Adders)

Model Type and Size	Body Length	Total Length
EFT	B*	T*
12mm – 100mm	10.0 (0.39)	10.0 (0.39)
EFD	BB*	TT*
12mm	7.2 (0.28)	7.2 (0.28)
16mm – 100mm	10.0 (0.39)	10.0 (0.39)

*Add the following lengths to the overall length dimension for EFT and EFD cylinders when specifying a magnet option.

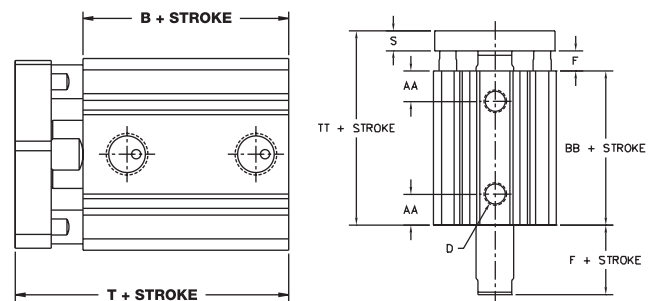



Bumpers (B)

(Stroke reduction by model for all bores)

Model	Stroke Reduction mm (in)
Double Acting, Non-Rotating	3.0 (.12)


EF2 Accessory Options and Dimensions

Tooling Plate Styles

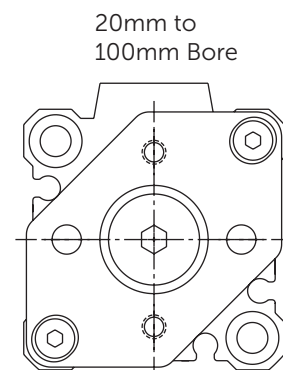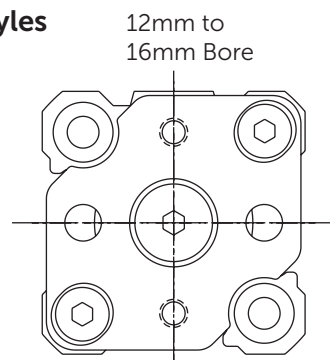

EF1 Accessory Options and Dimensions

Rod Pivot

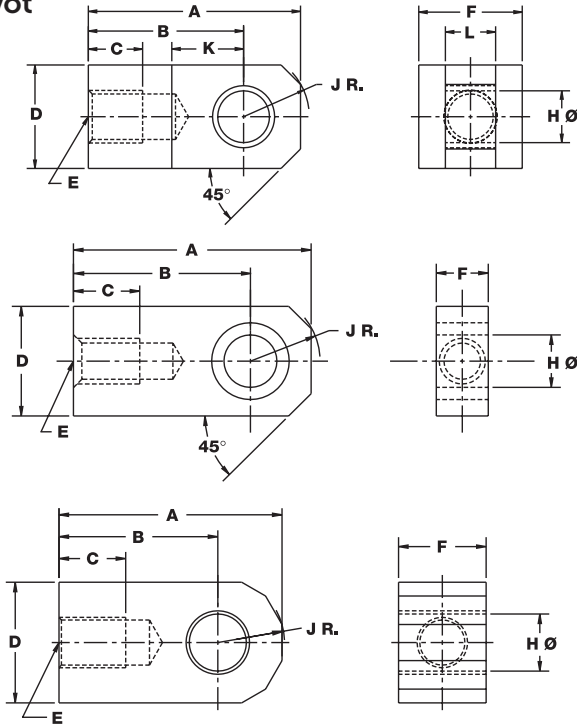

Metric Small Bore Rod Pivot (for 12mm to 63mm bore cylinders)

RPMK-12, RPMK-16, RPMK-20, RPMK-25,
RPMK-32, RPMK-40, RPMK-50

U.S. Customary Small Bore Rod Pivot (for 12mm to 63mm bore cylinders)

RPEK-12, RPEK-16, RPEK-20, RPEK-25,
RPEK-32, RPEK-40, RPEK-50

Metric and U.S. Customary Large Bore Rod Pivot (for 80mm and 100mm bore cylinders)

RPMK-80, RPEK-80, RPMK-100, RPEK-100


NOTE: To use Rod Pivot, cylinder must be specified with male thread option (MT). For inch series Rod Pivot Kits, change the third digit from an M to an E. For example: RPMK-32 is a metric size / RPEK-32 is a U.S. customary size.

Rod Pivot Dimensions

Model Number	Bore	A	B	C	D	E
RP(M,E)K-12	12mm (1/2")	21.5 (0.85)	16.0 (0.63)	6.0 (0.24)	10.0 (0.39)	M5 x 0.8 (# 8-32 UNC)
RP(M,E)K-16	16mm (5/8")	32.0 (1.26)	25.0 (0.98)	8.0 (0.24)	12.0 (0.47)	M6 x 1.0 (# 8-32 UNC)
RP(M,E)K-20	20mm (3/4")	34.0 (1.34)	25.0 (0.98)	8.5 (0.24)	15.9 (0.63)	M8 x 1.25 (# 10-32 UNF)
RP(M,E)K-25	25mm (1")	41.0 (1.61)	30.0 (1.18)	10.5 (0.32)	20.0 (0.79)	M10 x 1.25 (1/4-28 UNF)
RP(M,E)K-32	32mm (1-1/4")	40.5 (1.59)	30.0 (1.18)	14.0 (0.35)	22.0 (0.87)	M14 x 1.5 (5/16-24 UNF)
RP(M,E)K-40	40mm (1-1/2")	40.5 (1.59)	30.0 (1.18)	14.0 (0.43)	22.0 (0.87)	M14 x 1.5 (3/8-24 UNF)
RP(M,E)K-50	50mm (2") 63mm (2-1/2")	53.8 (2.12)	40.0 (1.58)	18.0 (0.71)	28.0 (1.10)	M18 x 1.5 (1/2-20 UNF)
RP(M,E)K-80	80mm (3-1/4")	70.2 (2.77)	50.0 (1.97)	21.0 (0.83)	38.0 (1.50)	M22 x 1.5 (5/8-18 UNF)
RP(M,E)K-100	100mm (4")	77.9 (3.07)	55.0 (2.17)	21.0 (0.83)	44.0 (1.73)	M26 x 1.5 (3/4-16 UNF)

Model Number	Bore Size	F	H	J	K	L
RP(M,E)K-12	12mm (1/2")	10.0 (0.19)	5.0 (0.188)	6.2 (0.25)	6.9 N/A	4.7 N/A
RP(M,E)K-16	16mm (5/8")	12.0 (0.24)	5.0 (0.188)	7.8 (0.31)	13.9 N/A	6.2 N/A
RP(M,E)K-20	20mm (3/4")	15.9 (0.30)	8.0 (0.313)	10.2 (0.41)	11.4 N/A	7.7 N/A
RP(M,E)K-25	25mm (1")	20.0 (0.38)	10.0 (0.375)	12.6 (0.50)	13.9 N/A	9.7 N/A
RP(M,E)K-32	32mm (1-1/4")	22.0 (0.69)	10.0 (0.375)	11.9 (0.47)	13.9 N/A	17.6 N/A
RP(M,E)K-40	40mm (1-1/2")	22.0 (0.69)	10.0 (0.375)	11.9 (0.47)	13.9 N/A	17.6 N/A
RP(M,E)K-50	50mm (2") 63mm (2-1/2")	28.0 (0.85)	14.0 (0.500)	15.9 (0.63)	19.9 N/A	21.6 N/A
RP(M,E)K-80	80mm (3-1/4")	27.6 (1.09)	18.0 (0.750)	21.0 (0.83)	N/A	N/A
RP(M,E)K-100	100mm (4")	31.6 (1.24)	22.0 (0.875)	24.0 (0.94)	N/A	N/A

The Model Number for all EF1 cylinders consists of alphanumeric clusters. These designate type, bore size, stroke lengths, and special options. Please refer to the charts below for an example of a standard EF1 model. This is a 25mm bore, 10mm stroke, double acting, single end rod cylinder with additional options.

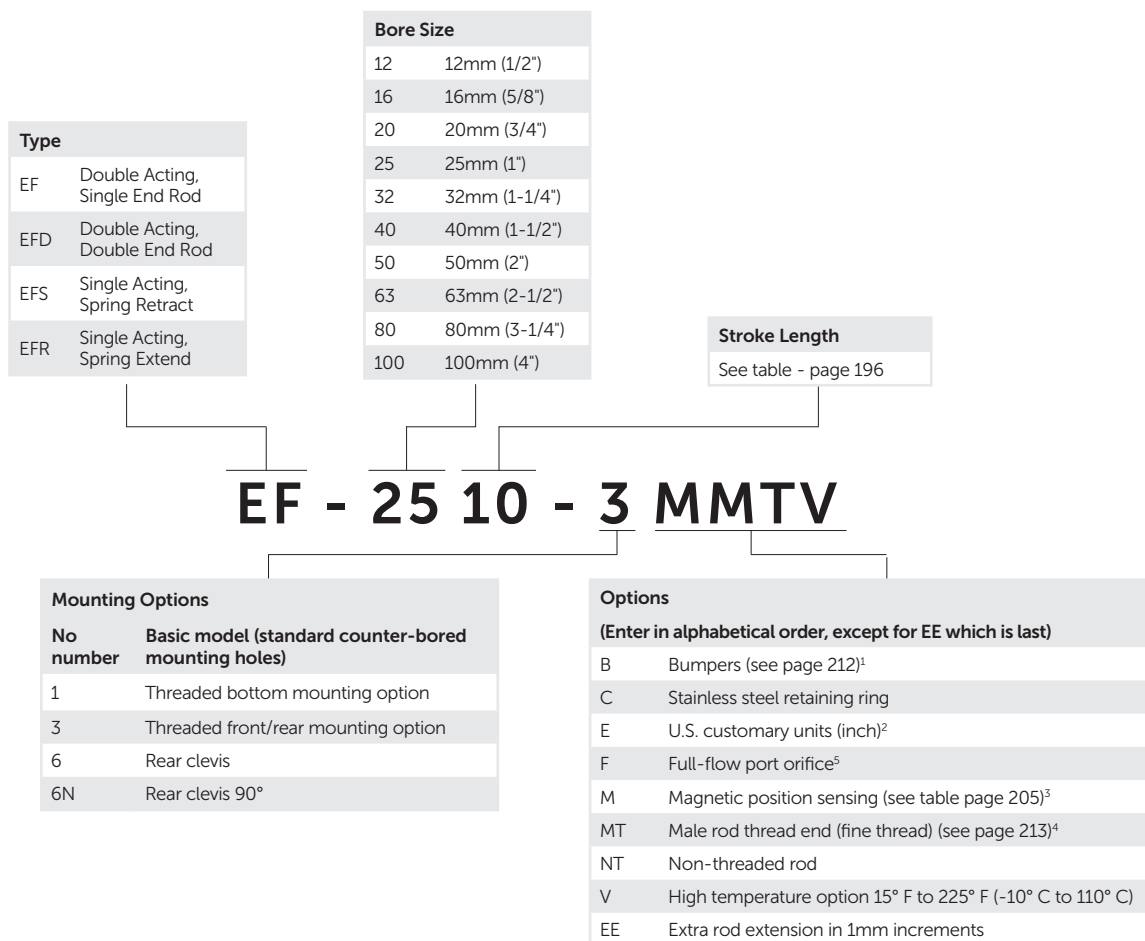

¹ Bumpers reduce stroke length by 3mm. When bumper is specified with option V, standard bumper material is supplied. Operating temperature remains 15° to 160°F (-10° to 70°C).

² When option E is specified, user interface threads are designated U.S. customary (inch). This includes ports, rod threads and threaded mounting options (as applicable).

³ When magnetic position sensing is specified with option V, operating temperature remains 15° to 160°F (-10° to 70°C). This combination is recommended when fluoroelastomer is specified for compatibility.

⁴ MT option must be specified to use rod pivot.


⁵ Automatically includes bumpers, so stroke is reduced by 3mm.

Please note that throughout all catalog charts, metric measurements are shown first and U.S. customary units (inches) are in parentheses.

*NOTE: Numbers in parentheses are the equivalent bore size in inches and listed FOR REFERENCE ONLY. DO NOT use for model designation.

**When stroke length exceeds 30mm, a threaded mounting option should be considered. Mounting bolts that span the entire cylinder length may not be readily available.

The Model Number for all EF2 cylinders consists of alphanumeric clusters. These designate type, bore size, stroke lengths, and special options. Please refer to the charts below for an example of a standard EF2 model. This is a double acting, guided cylinder with 32mm bore, 25mm stroke, and additional options.

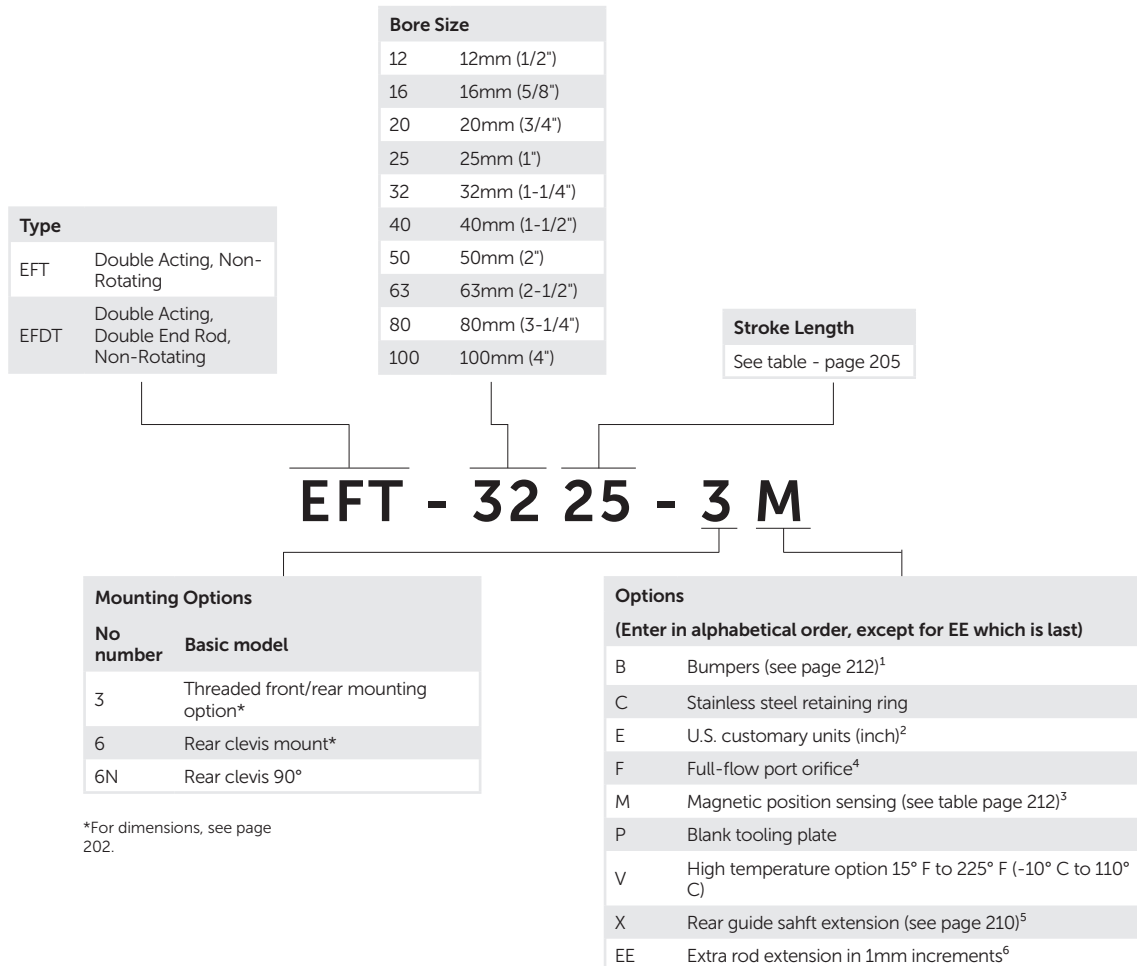

*For dimensions, see page 202.

¹ Bumpers reduce stroke length by 3mm. When bumper is specified with option V, standard bumper material is supplied. Operating temperature remains 15° to 160°F (-10° to 70°C).

² When option E is specified, user interface threads are designated U.S. customary (inch). This includes ports, rod threads and threaded mounting options (as applicable).

³ When magnetic position sensing is specified with option V, operating temperature remains 15° to 160°F (-10° to 70°C). This combination is recommended when fluoroelastomer is specified for compatibility.

⁴ Automatically includes bumpers, so stroke is reduced by 3mm.

⁵ Available stroke lengths starting at 10mm.

⁶ In EFDT models, extra extension dimension is added to both tooling plate and rod ends.

Please note that throughout all catalog charts, metric measurements are shown first and U.S. customary units (inches) are in parentheses.

*NOTE: Numbers in parentheses are the equivalent bore size in inches and listed FOR REFERENCE ONLY. DO NOT use for model designation.

**When stroke length exceeds 30mm, a threaded mounting option should be considered. Mounting bolts that span the entire cylinder length may not be readily available.





EF1 Repair Parts

IMI Bimba EF1 cylinders are repairable. To order repair kits, please provide the correct bore code in the kit part number blank for the desired size repair kit. Optional seals are designated by the suffix option. Repair kits include the standard bronze rod bushing, piston, rod, and body seals.*

Part #	Description	Material
1	Rod	4301 (303) Stainless Steel
2	Rod Seal/Wiper	Nitrile (Standard) or Fluoroelastomer (High Temperature Option)
3	Retaining Ring	Zinc Plated Carbon Steel or Stainless Steel (optional)
4	Rod Guide	12-20mm: Bronze / 25-100mm: Anodized Aluminum
5	Bushing	12-20mm: Bronze / 25-100mm: Self Lubricating Nylon
6	Piston Seal	Nitrile (Standard) or Fluoroelastomer (High Temperature Option)
7	Cylinder Body	Polytetrafluoroethylene (PTFE) Impregnated Hard Anodized Aluminum
8	Rod Guide Seal	Nitrile (Standard) or Fluoroelastomer (High Temperature Option)
9	Piston	High Strength Aluminum Alloy
10	Spring	Corrosion Protected Music Wire

Part #	Description
K-B-EF-[Bore]	EF Series Repair Kit
K-B-EFD-[Bore]	EFD Series Repair Kit
K-B-EF-[Bore]-V	EF Series Repair Kit with FKM High Temperature Seals

NOTE: Replace [Bore] in the part number with the appropriate bore size indicator.

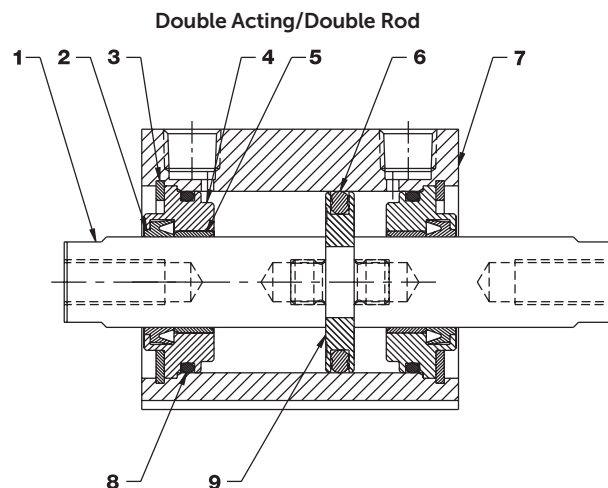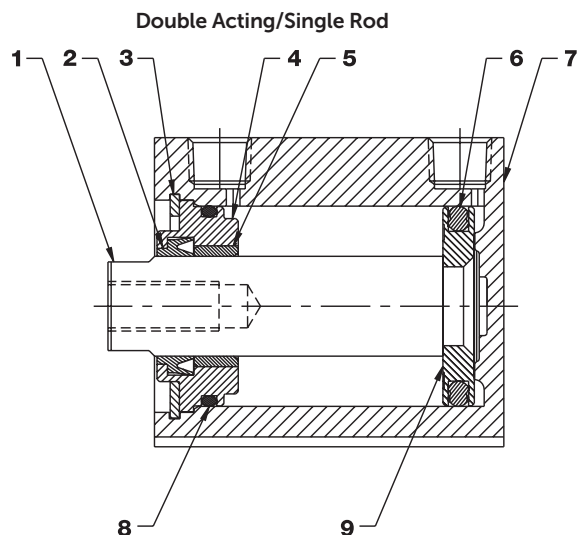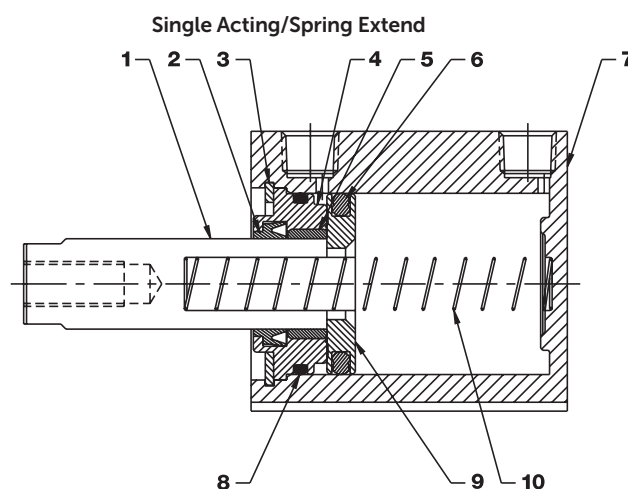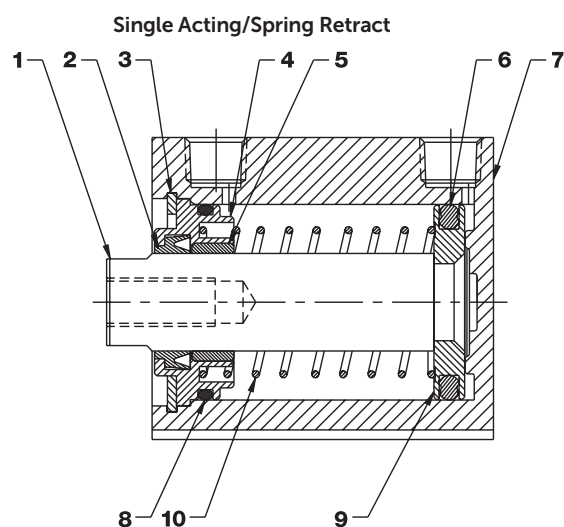

EF2 Repair Parts

EF2 cylinders use the same basic repair kits as EF1 cylinders. For additional part not included in these kits, contact your local IMI Bimba distributor to request a quote.

Part #	Description	Material
1	Rod	4301 (303) Stainless Steel
2	Rod Seal/Wiper	Nitrile (Standard) or Fluoroelastomer (High Temperature Option)
3	Retaining Ring	Zinc Plated Carbon Steel or Stainless Steel (Optional)
4	Rod Guide	12-20mm: Bronze / 25-100mm: Anodized Aluminum
5	Bushing	12-20mm: Bronze / 25-100mm: Self Lubricating Nylon
6	Piston Seal	Nitrile (Standard) or Fluoroelastomer (High Temperature Option)
7	Cylinder Body	Polytetrafluoroethylene (PTFE) Impregnated Hard Anodized Aluminum
8	Rod Guide Seal	Nitrile (Standard) or Fluoroelastomer (High Temperature Option)
9	Piston	High Strength Aluminum Alloy
11	Cap Screw	Stainless Steel
12	Guide Rod	Chrome Plated Stainless Steel
13	Guide Bushing	Delrin
14	Flat Screw	Stainless Steel
15	Plate	Clear Coat Anodized Aluminum

