



Multiple Position FOP Flat-1® Compact Cylinders




-
- Bore sizes: 9/16", 3/4", 1-1/16", 1-1/2", 2", 2-1/2", 3", 4"
 - 304 stainless steel body prevents corrosion
 - Standard oil impregnated bronze rod bushing
 - Stainless piston rod
 - Maximum Pressure: 200 PSI (air only)
 - Other positions (4, 5, etc.) are available as specials.
Contact your local distributor for info.

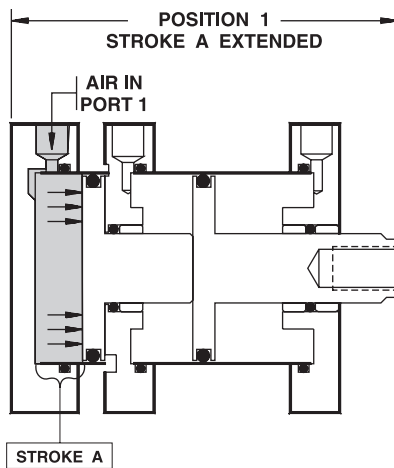

Position 1
Air is supplied to Port 1, cylinder extends stroke length A.

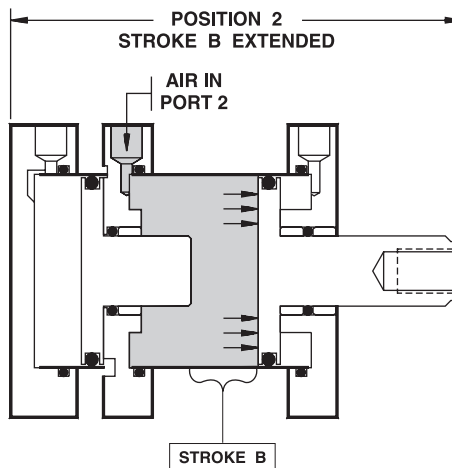

Position 2
Air is supplied to Port 2, cylinder extends stroke length B.

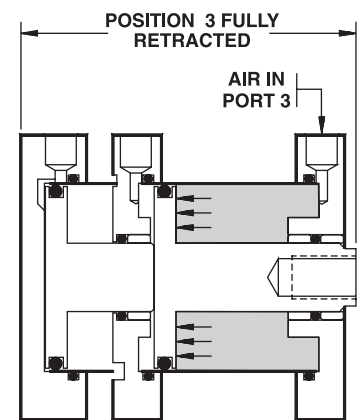

Position 3
Cylinder is fully retracted by supplying air to Port 3.

NOTE: For Magnetic Position Sensing option, magnet is mounted only on the piston of the Stroke B side.

Technical Specifications


Materials of Construction

- Cylinder Body:** 304 Stainless Steel
- Heads:** Anodized Aluminum Alloy
- Piston Rod:** Ground and Polished 303 Stainless Steel
- Seals:** Buna-N (high temperature seals optional)
- Rod Bushing:** Oil-Impregnated Bronze

Engineering Specifications

- Pressure Rating:** 200 PSI maximum (air only)
- Temperature:** -20° F to 150° F (-25° C to 65° C) Standard
- Fluoroelastomer seals rated for higher temperature applications are available. If cylinders are operated below 0° (-18° C) for extended time periods, special modifications may be required. Special seal materials are available upon request.

Multiple Position FOP Flat-1® Basic Models

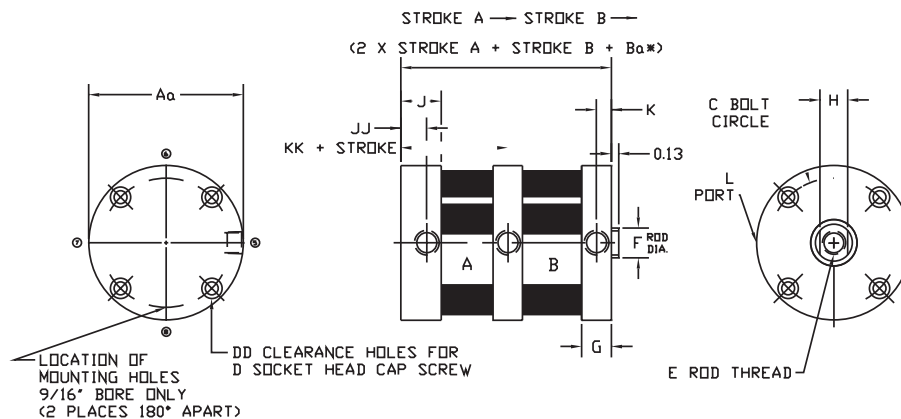


*Some options affect cylinder length; see page 183

Mounting Options


Pivot Mount

(-1 shown) Complete with bronze pivot bushing
(Not available as an accessory)

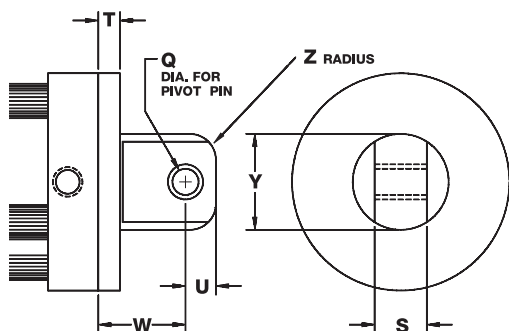


Screw Clearance Holes

(available either or both ends) (-4R shown) Screw
clearance holes standard on all center sections

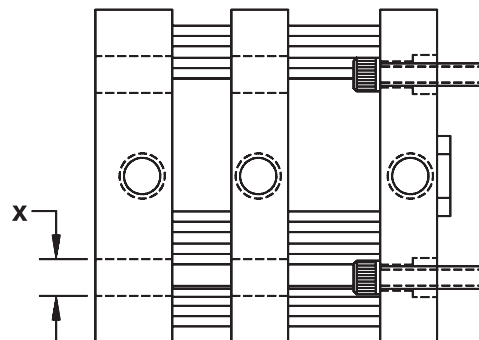


Threaded Mounting Holes

(available either or both ends) (3, -3F or -3R shown)
9/16" Bore

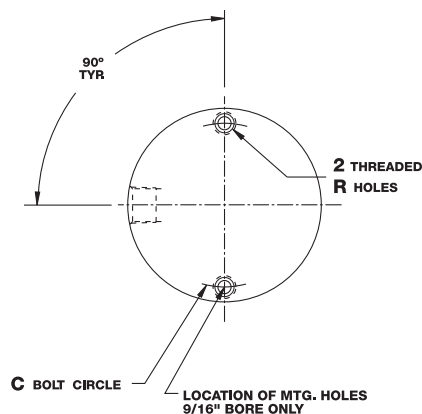

3/4" Bore and larger

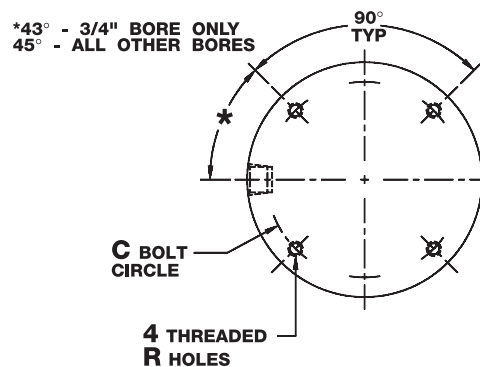

Multiple Position FOP Flat-1® Dimensions (in)

Bore	Aa	Ba*	C	DD	D	E Standard	E Coarse	E Depth	F
9/16" (02)	1.13	1.14	0.88	2	#4	#8-32 UNC	N/A	0.46	0.25
3/4" (04)	1.50	1.14	1.22	4	#6	#10-32 UNF	#10-24 UNC	0.46	0.31
1-1/16" (09)	2.00	1.67	1.69	4	#6	5/16-24 UNF	5/16-18 UNC	0.70	0.50
1-1/2" (17)	2.63	1.70	2.19	4	#10	3/8-24 UNF	3/8-16 UNC	0.70	0.63
2" (31)	3.13	1.80	2.69	4	#10	1/2-20 UNF	1/2-13 UNC	0.70	0.75
2-1/2" (50)	3.75	2.25	3.25	4	1/4	1/2-20 UNF	1/2-13 UNC	0.70	0.75
3" (70)	4.25	2.34	3.78	4	1/4	5/8-18 UNF	5/8-11 UNC	0.73	0.88
4" (125)	5.50	3.00	4.94	4	5/16	3/4-16 UNF	3/4-10 UNC	0.80	1.00

Bore	G	H	J	JJ	K	KK	L
9/16" (02)	0.34	0.22	0.47	0.27	0.14	0.49	#10-32
3/4" (04)	0.34	0.25	0.47	0.27	0.14	0.49	#10-32
1-1/16" (09)	0.50	0.44	0.69	0.44	0.25	0.73	1/8 NPT
1-1/2" (17)	0.50	0.50	0.69	0.44	0.25	0.74	1/8 NPT
2" (31)	0.53	0.63	0.72	0.44	0.25	0.78	1/8 NPT
2-1/2" (50)	0.66	0.63	0.91	0.58	0.33	0.93	1/4 NPT
3" (70)	0.69	0.75	0.94	0.58	0.33	0.95	1/4 NPT
4" (125)	0.84	0.88	1.22	0.80	0.42	1.36	3/8 NPT

Bore	R	LG	WD	Q	S	T	U	W	X	Y	Z
9/16" (02)	#4-40 UNC	0.38	0.56	0.19	0.38	0.19	0.25	0.75	0.20	0.63	0.19
3/4" (04)	#6-32 UNC	0.38	0.69	0.19	0.38	0.19	0.25	0.75	0.23	0.75	0.19
1-1/16" (09)	#6-32 UNC	0.50	0.88	0.19	0.38	0.25	0.25	0.81	0.25	0.75	0.19
1-1/2" (17)	#10-24 UNC	0.50	1.00	0.38	0.75	0.25	0.44	1.19	0.34	1.38	0.38
2" (31)	#10-24-UNC	0.63	1.12	0.38	0.75	0.31	0.44	1.25	0.34	1.38	0.38
2-1/2" (50)	1/4-20 UNC	0.63	1.12	0.38	0.75	0.38	0.44	1.31	0.41	1.38	0.38
3" (70)	1/4-20 UNC	0.75	1.25	0.63	1.00	0.38	0.56	1.69	0.41	1.88	0.38
4" (125)	5/16-18 UNC	0.75	1.38	0.63	1.00	0.44	0.56	1.75	0.50	1.88	0.38

*See page 183 for length adders for options.

Multiple Position FOP Flat-1® Accessory Options and Dimensions (in)

Length Adder Dimensions for Options

(Dimensional variations from standard as shown)

Bore	Length Adder		
	Low Friction Seals (L)	Magnetic Position Sensing* (M)	Low Friction Seals and Magnetic Position Sensing
9/16" (02), 3/4" (04)	0.50	0.88	1.12
1-1/16" (09), 1-1/2" (17), 2" (31), 2-1/2" (50)	0.75	0.88	1.25
3" (70), 4" (125)	1.00	0.88	1.38

*A minimum total stroke of 0.38" is required to sense extending end-of-stroke position.


Minimum Stroke

	Bore							
Model	9/16" (02)	3/4" (04)	1-1/16" (09)	1-1/2" (17)	2" (31)	2-1/2" (50)	3" (70)	4" (125)
Base Model Stroke A	0.19	0.19	0.25	0.25	0.25	0.38	0.38	0.34

No minimum for stroke B. No minimum for stroke A or B with low friction seal option.


Rod Wiper (Option W)

(Buna N standard, not available in high temperature option)

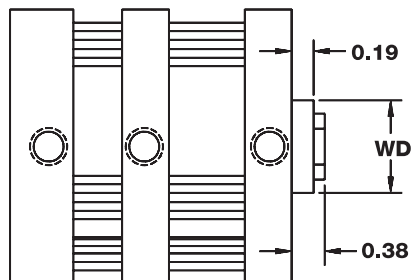

Bore	WD
9/16" (02)	0.56
3/4" (04)	0.69
1-1/16" (09)	0.88
1-1/2" (17)	1.00
2" (31), 2-1/2" (50)	1.13
3" (70)	1.25
4" (125)	1.38

Male Rod Ends (Option MT or CMT)

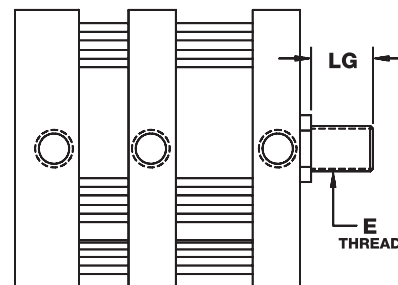

Bore	E		LG
	MT	CMT	
9/16" (02)	#8-32	N/A	0.38
3/4" (04)	#10-32	#10-24	0.38
1-1/16" (09)	5/16-24	5/16-18	0.50
1-1/2" (17)	3/8-24	3/8-16	0.50
2" (31), 2-1/2" (50)	1/2-20	1/2-13	0.63
3" (70)	5/8-18	5/8-11	0.75
4" (125)	3/4-16	3/4-10	0.75

Multiple Position FOP Flat-1® Accessory Options and Dimensions (in) Weights

Bore	Approximate Cylinder Weights (oz)	
	Base	Adder per 1/8" of stroke
9/16" (02)	3.3	0.16
3/4" (04)	4.5	0.2
1-1/16" (09)	9.9	0.6
1-1/2" (17)	18.7	0.8
2" (31)	24.5	1
2-1/2" (50)	41.3	1.2
3" (70)	52.9	1.6
4" (125)	102.7	2

Flat-1® Accessory Selection Guide (All Models)


Accessory	Flat-1®	Square Flat-1®	Square Flat-II®	Flat-II®	FO2	FOP
Clevis Bracket	X	X	X	X	N/A	X
Trunnion Bracket	X	N/A	N/A	X	N/A	N/A
Rod Pivot	X	X	N/A	N/A	X	X
Pivot Attachment	N/A	X	X	N/A	N/A	N/A

Clevis Bracket

Anodized aluminum alloy, complete with stainless steel pin

Model	Bore	LD	MT	Q	S	SH	SD	TH	TL
BC-1	9/16" (02), 3/4" (04), 1-1/16" (09)	0.56	0.75	0.19	0.39	#6	1.00	0.16	0.78
BC-2	1-1/2" (17), 2" (31), 2-1/2" (50)	0.94	1.38	0.38	0.75	#10	1.75	0.22	1.34
BC-3	3" (70), 4" (125)	1.25	2.00	0.63	1.00	0.25	2.50	0.25	1.81


Bracket intended to mount with either rod pivot or pivot mount, not directly to the cylinder rear head.

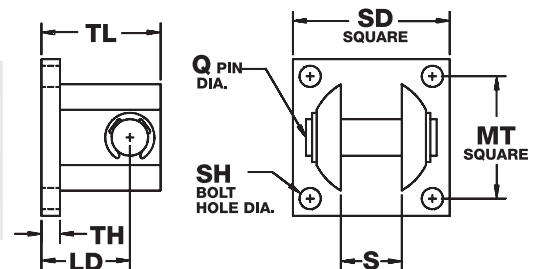


Trunnion Bracket (pair)

Anodized aluminum alloy, complete with bronze pivot bushings

Model	Bore	BA	BT	HT	LT	M	N	NA	NB
BT-1	3/4" (04)	0.56	#10	0.63	1.12	0.31	0.13	0.30	0.22
BT-2	1-1/16" (09), 1-1/2" (17), 2" (31)	0.81	0.25	0.88	1.50	0.50	0.25	0.38	0.31
BT-3	2-1/2" (50), 3" (70)	0.94	0.31	1.00	1.63	0.63	0.31	0.45	0.38
BT-4	4" (125)	1.06	0.38	1.25	1.88	0.75	0.38	0.55	0.44

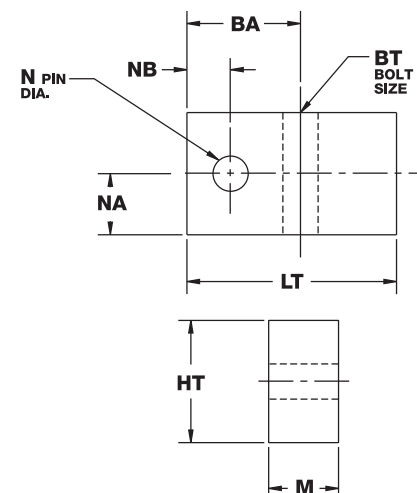

The Model Number for all Multiple Position FOP Flat-1® cylinders consists of alphanumeric clusters. These designate type, bore size, stroke lengths, mounting, and special options. Please refer to the charts below for an example of a standard FOP Flat-1® model. This is a multiple position 1-1/2" bore, 3/8" stroke for position A, 1/4" stroke for position B, rear head pivot mount cylinder with high temperature seals.

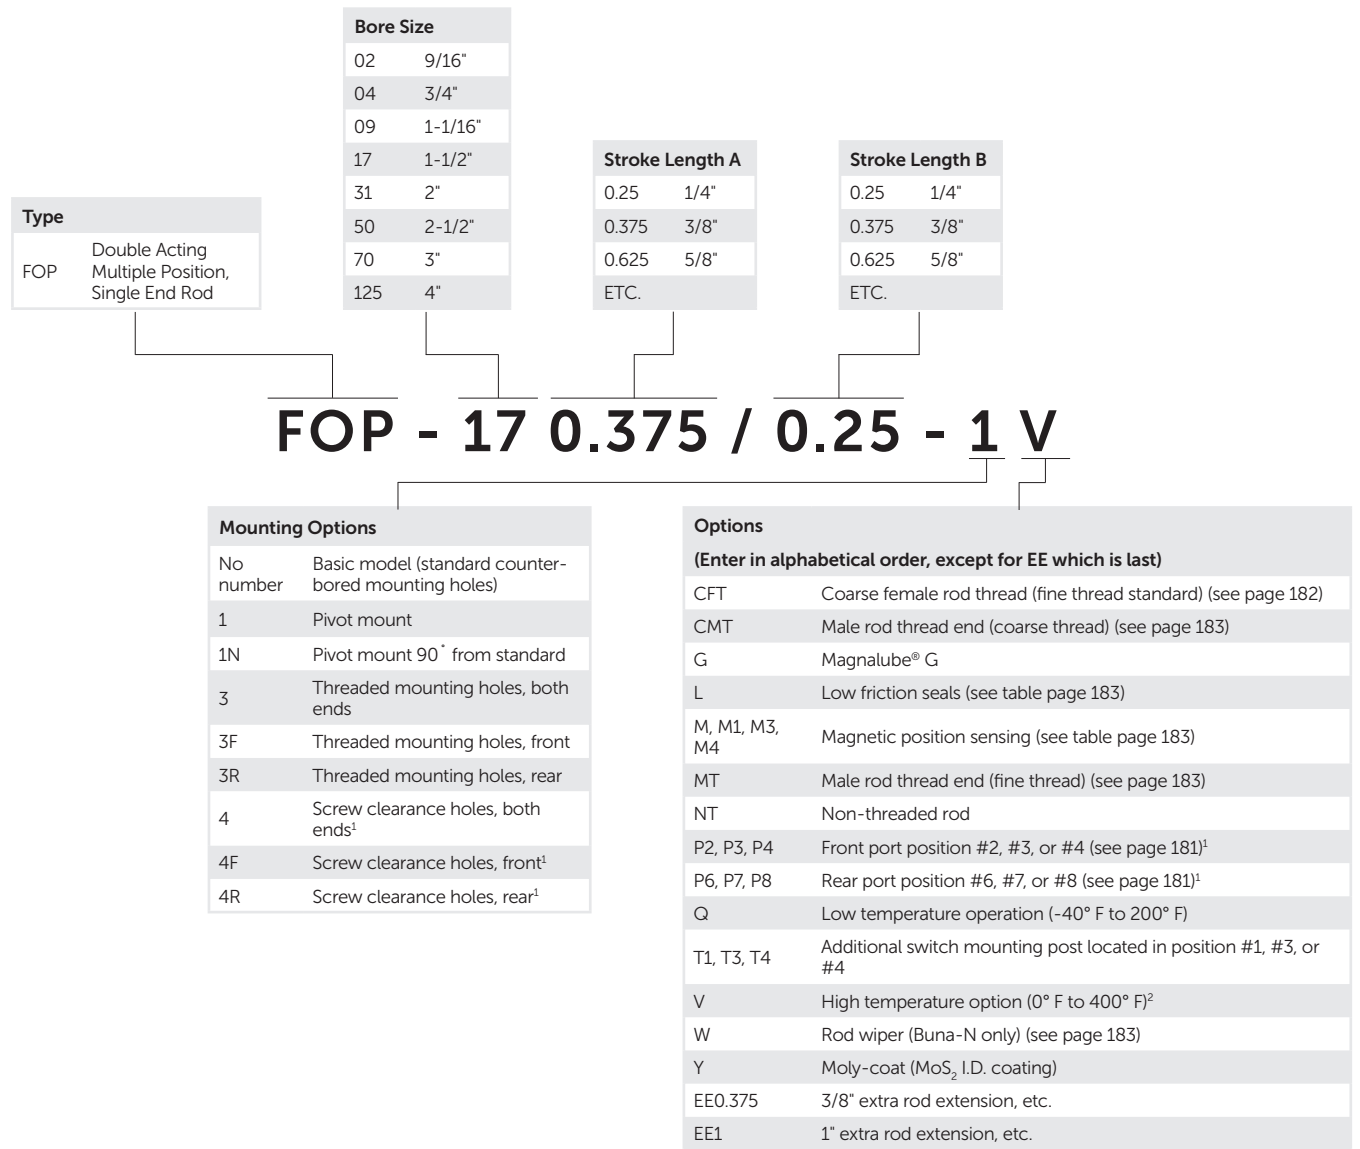

¹ Not available in 9/16" bore.

² If magnetic position sensing is specified with option V, standard Buna-N based magnet will be provided. Magnetic position sensing is not reliable above 200° F. Overall cylinder length increases with the magnet option.

Multiple Position FOP Repair Kits

IMI Bimba Multiple Position FOP cylinders are repairable. To order repair kits, please provide the correct bore code in the kit part number blank for the desired size repair kit. Optional seals are designated by the suffix option. Repair kits include the standard bronze rod bushing, piston, rod, and body seals. For cylinders with optional composite bushings, please order those bushing as a separate repair part with part number (PF4-___). For cylinders where FKM seals, wipers, or scrapers are required, complete end caps assemblies are provided to allow for easier repair.

Basic Repair Kit (K-B-FOP)*		
Part No.	Description	Quantity
PF-1	Rod Seal	2
PF-2	Piston Seal	2
PF-3	Tube Seal	3
PF-4	Bushing	3

Wiper Option Repair Kit (K-B-FOP-W)*		
Part No.	Description	Quantity
PF-1	Rod Seal	2
PF-2	Piston Seal	2
PF-3	Tube Seal	3
PF-4	Bushing	2
PF-5	Wiper Bushing	1
PF-6	Wiper	1

*Must specify bore size when ordered. Contact your local IMI Bimba distributor for pricing on kits and other repair parts.