


Pneu-Turn Cylinders

The IMI Bimba Pneu-Turn Rotary Actuator is available with these catalog options:

- Angle Adjustment
- Bumpers
- Adjustable Cushions
- Dual Shaft
- Square Key
- MRS® Magnetic Position Sensing
- Spring Return
- Oil Service Seals
- High Temperature Option
- Ball Bearing
- Rear Shaft
- Hardened Shaft
- Anti-backlash Rack

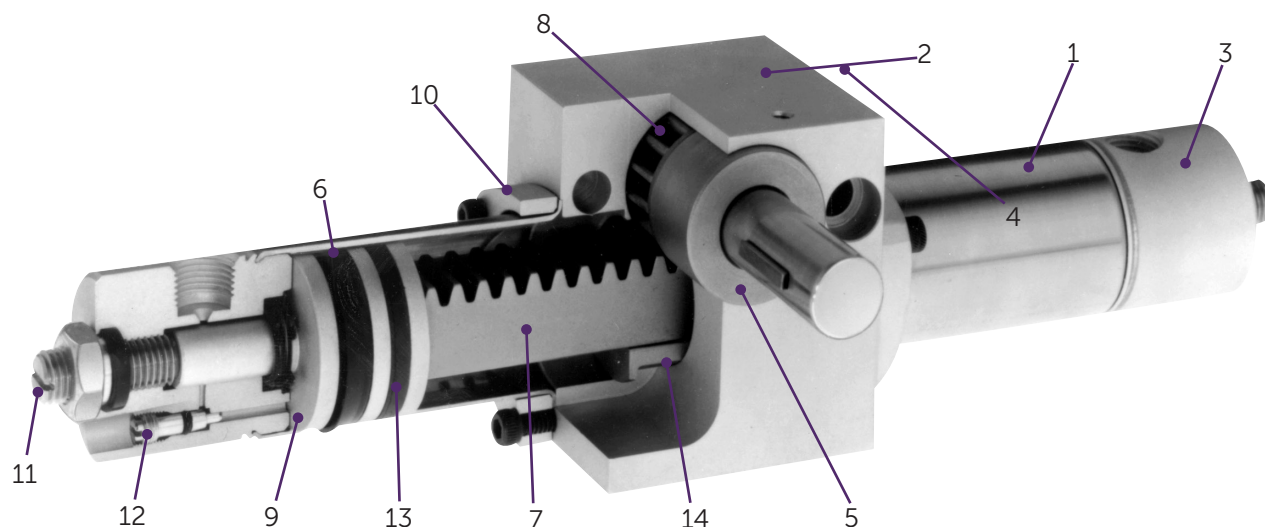

1. Cylinder Bodies – 304 stainless steel for maximum seal life.
2. Actuator Body – High strength, anodized aluminum alloy for maximum corrosion protection.
3. Porting Ends – High strength, anodized aluminum alloy.
4. Shaft – High strength, 303 stainless steel for maximum wear resistance and long life. (hardened steel optional).
5. Shaft Bearings – Self-lubricating, sintered iron copper material for lower friction. (ball bearings optional).
6. Piston Seals – Buna "N", U-cup type for low breakaway friction and long life.
7. Rack – Carbon steel for maximum wear resistance.
8. Pinion – High strength, alloy steel for greater durability.
9. Piston – High strength, aluminum alloy.
10. Cylinder Body Retainer Ring – High strength, stainless steel for maximum corrosion protection.
11. Angle Adjustment – An option that allows 45° of adjustability each end.
12. Adjustable Cushions – An option that controls deceleration at the end of the rotation.
13. MRS® Magnetic Position Sensing – An option that provides a magnet for sensing position.
14. Rack Support – Sintered brass material for increased load carrying capabilities.

Actuator Operation

Rotary action of the Pneu-Turn Rotary Actuator is achieved through the use of a rack and pinion assembly. Just as with a pneumatic or hydraulic cylinder, the speed of rotation may be controlled through the use of flow controls. The action at the end of the rotation can be controlled by the use of adjustable cushions, which are available as an option.

Care should be taken to insure that the inertial force does not exceed the published torque capacity. An external stop may be necessary to avoid exceeding the torque capacity due to inertial loads.

When mounting the Pneu-Turn against the shaft side of the housing, be sure to provide clearance for the pilot diameter to avoid excessive bearing pressure.

For standard models, axial loads must only be applied in the direction indicated on the dimensional drawings. The Dual Shaft or Rear Shaft options can be used to correctly orient tension induced axial loads. With the Ball Bearing option, axial loads can be applied in either direction.

The Angle Adjustment Option will allow 45° of adjustability. If cushions are ordered in conjunction with the angle adjustment option, adjustability will be 10°.

Port Positioning

Ports on the Pneu-Turn may be repositioned to accommodate any air line configuration by loosening the three body retainer screws. Once desired port positions are obtained, tighten screws to specified torque values.

Lubrication

The Pneu-Turn Rotary Actuator is pre-lubricated at the factory for extensive, maintenance-free operation. The life of the rotary actuator can be lengthened by providing additional lubrication with an air line mist lubricator or direct introduction of oil to the actuator every 500 hours of operation. Recommended oils for Buna N seals are medium to heavy inhibited hydraulic and general purpose oil. If High Temperature seals, use Dow Corning #710. Other types of pre-lube are available upon request.

The rack and pinion gear and ball bearings are pre-lubricated at the factory for extensive, maintenance-free operation. If additional lubrication should be required, use a high grade bearing grease.

Woodruff Key Location

The standard position of the woodruff key is 12 o'clock at the center of rotation. For Three-Position PneuTurn, the center position is 12 o'clock, $\pm 2^\circ$.

Engineering Specifications

Ratings

Pressure Rating:	150 PSI
Rotation	9/16" - 3/4" Bore: 0°-15°
Tolerance*:	1-1/16" - 2" Bore: 0°-10°
Temperature Range**:	Buna-N (Standard): -20° F to 200° F Option V High Temperature Seals: 0° F to 400° F High Temperature Seals with Ball Bearing: 0° F to 250° F
Backlash:	Without X option: 1-1/2° of Arc Maximum. Double rack actuators have zero backlash at end of rotational stroke. With X option: Single rack models have zero mid rotational and end of rotation backlash. Double rack models have zero mid-rotational backlash.
Breakaway:	<5 PSI

* Bumper option allows compression under pressure which may exceed tolerance. If higher accuracy desired, please specify angle adjustment.

** If cylinders are operated at temperatures below 0° for extended time periods, special modifications may be required. Special seal materials are available on request.

Standard Line

Series	9/16"		3/4"		1-1/16"		1-1/2"		2"	
	(006)	(014)	(017)	(033)	(037)	(074)	(098)	(196)	(247)	(494)
Theoretical Torque Capacity (in.-lbs./PSI)	0.068	0.135	0.166	0.331	0.369	0.739	0.982	1.963	2.468	4.935
Bearing Load (Axial) (lbs.)	25	25	25	25	40	40	40	40	80	80
Bearing Load (Radial) (lbs.)	200	200	250	250	300	300	350	350	500	500
Distance Between Bearing Midpoints (in.)	0.77	0.77	0.96	0.96	1.24	1.24	1.70	1.70	1.98	1.98
Maximum Rate of Rotation (@ 100 PSI With No Load)	3000°/sec.	3000°/sec.	3500°/sec.	3500°/sec.	2000°/sec.	2000°/sec.	1500°/sec.	1500°/sec.	1000°/sec.	1000°/sec.
Weight (Approximate) (oz.)	6	11.5	11	20.5	21	38	48	89	105	152
Body Retainer Cap Screw Recommended Tightening Torque (in.-lbs.)	10	10	12	12	12	12	20	20	20	20

For Ball Bearing Option, the Following Specifications Apply

Series	9/16"		3/4"		1-1/16"		1-1/2"		2"	
	(006)	(014)	(017)	(033)	(037)	(074)	(098)	(196)	(247)	(494)
Bearing Load (Axial) (lbs.)	55	55	75	75	100	100	110	110	130	130
Bearing Load (Radial) (lbs.)	205	205	270	270	380	380	425	425	740	740
Distance Between Bearing Midpoints (in.)	.72	.72	.96	.96	1.26	1.26	1.71	1.71	1.82	1.82
Weight (Approximate) (oz.)	6	11.5	10.5	20	20.5	37.5	47	88	103	150

Engineering Specifications

Kinetic Energy Capacity

A load connected to the shaft of a Pneu-Turn will produce kinetic energy as it is rotated. This kinetic energy must be absorbed by the Pneu-Turn or other stopping device. If the Pneu-Turn is to stop the load without external devices, then the application kinetic energy must not exceed the maximums noted in the table below.

Maximum Allowable Kinetic Energy (in.-lbs)

Size	Without Cushions	With Cushions
9/16" (006 / 014)	0.02	N/A
3/4" (017 / 033)	0.04	0.08
1-1/16" (037 / 074)	0.07	0.88
1-1/2" (098 / 196)	0.41	7.80
2" (247 / 494)	1.60	13.00

The kinetic energy developed by your application can be determined by using the equations noted below:

$$KE = 0.5 * I * w^2$$

$$w = 1.20 * (\phi / t)$$

LEGEND:

KE = Kinetic energy (in.-lbs.)

I = Moment of inertia (in.-lb.-sec.²)

w = Rotational speed (radians/sec.)


ϕ = Angle of rotation (radians)

t = Time of rotation (sec.)

W = Weight of load (lb.)

g = Acceleration of gravity (386 in./sec.²)


Below are examples of attachments, their geometry, and the equation to use to determine the Moment of Inertia.



Thin Disc
(mounted on side
through center)

$$I = \frac{W}{g} * \frac{r^2}{4}$$


Figure 1



Thin Disc
(centered)

$$I = \frac{W}{g} * \frac{r^2}{2}$$


Figure 2



Thin Rectangular Plate
(Centered and
mounted on side)

$$I = \frac{W}{g} * \frac{(2(a1))^2}{12}$$


Figure 3



Thin Rectangular Plate
(Off-centered)

$$I = \frac{Wa_1}{g} * \frac{4(a1)^2 + b^2}{12} + \frac{Wa_2}{g} * \frac{4(a2)^2 + b^2}{12}$$


Figure 4



Thin Rectangular Plate
(Centered)

$$I = \frac{W}{g} * \frac{(2(a1))^2 + b^2}{12}$$


Figure 5



Slender Rod
(Centered)

$$I = \frac{W}{g} * \frac{(2(a1))^2}{12}$$

Figure 6




Slender Rod
(Off-centered)

$$I = \frac{Wa_1}{g} * \frac{a1^2}{3} + \frac{Wa_2}{g} * \frac{a2^2}{3}$$

Figure 7

Dimensions

Single Rack Models (in)

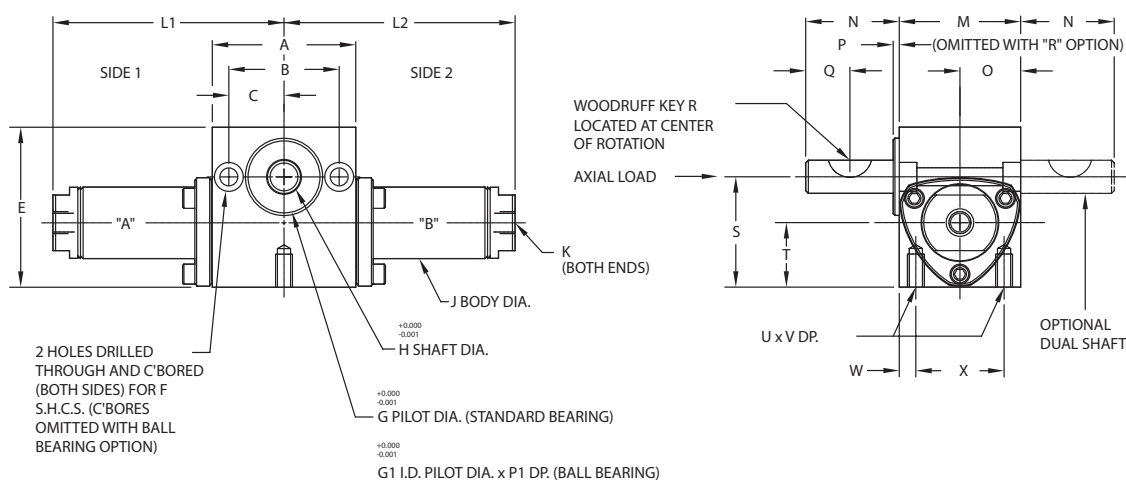

L1/L2 dimensions shown in chart on page 365.

Bore	A	B	C	E	E (With R Option)	F (C' Bores Omitted with Ball Bearing Option)	G (Std Bearing O.D. Pilot Dia.)
9/16" (006)	1.38	1.00	0.50	1.44	1.44	#8 S.H.C.S.	0.675
3/4" (017)	1.62	1.25	0.62	1.81	1.81	#10 S.H.C.S.	0.875
1-1/16" (037)	1.88	1.44	0.72	2.12	2.19	1/4" S.H.C.S.	0.968
1-1/2" (098)	2.38	1.81	0.90	2.81	2.84	5/16" S.H.C.S.	1.249
2" (247)	3.00	2.38	1.19	3.75	3.75	5/16" S.H.C.S.	1.749

Bore	G1 (Ball Bearing I.D. Pilot)	H	J	K	M	N	O	P	P1
9/16" (006)	0.750	0.250	0.61	#10-32 ¹	1.12	0.69	0.56	0.06	0.06
3/4" (017)	0.875	0.375	0.82	#10-32 ¹	1.37	1.06	0.69	0.06	0.06
1-1/16" (037)	1.125	0.500	1.12	1/8 NPT	1.75	1.31	0.88	0.06	0.09
1-1/2" (098)	1.375	0.625	1.56	1/8 NPT	2.25	1.38	1.12	0.09	0.09
2" (247)	1.875	0.875	2.08	1/4 NPT	2.56	2.00	1.28	0.11	0.10

Bore	Q	R2	S	T	U	V	W	X
9/16" (006)	0.31	#202.5	1.03	0.61	#8-32	0.44	0.19	0.75
3/4" (017)	0.50	#204	1.25	0.73	#10-24	0.38	0.19	1.00
1-1/16" (037)	0.62	#305	1.56	0.88	1/4-20	0.50	0.25	1.25
1-1/2" (098)	0.62	#405	2.09	1.16	5/16-18	0.62	0.31	1.62
2" (247)	0.75	#606	2.56	1.28	5/16-18	0.62	0.28	2.00


¹ Option-S ports are 1/8 NPT

² Key dimensions on page 369.

Dimensions

Single Rack Options (in)

(Dimensional variations from standard as shown.)

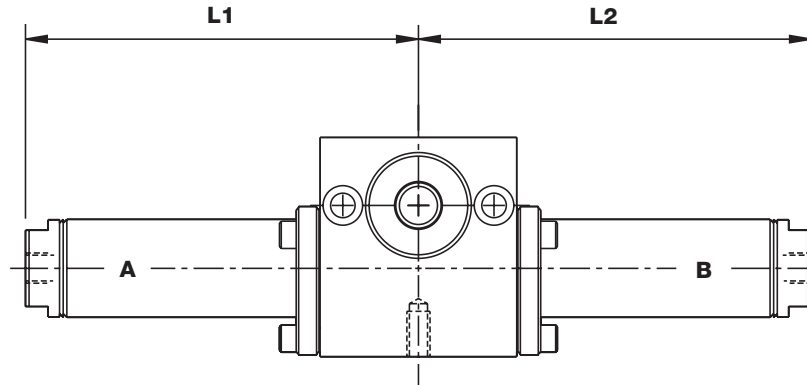

SIDE 1

SIDE 2

	9/16" (006)		3/4" (017)		1-1/16" (037)		1-1/2" (098)		2" (247)	
	L1	L2	L1	L2	L1	L2	L1	L2	L1	L2
Adder Per Degree of Rotation	0.0048	0.0048	0.0066	0.0066	0.0073	0.0073	0.0097	0.0097	0.0137	0.0137
Plus One Length Adder Below Per Side										
Base Unit (No Options)	1.52	1.52	1.63	1.63	2.03	2.03	2.34	2.34	2.84	2.84
Bumper Both Sides (B1)	1.64	1.64	1.77	1.77	2.18	2.18	2.49	2.49	3.04	3.04
Bumper CCW Side (B2)	1.52	1.64	1.63	1.77	2.03	2.18	2.34	2.49	2.84	3.04
Bumper CW Side (B3)	1.64	1.52	1.77	1.63	2.18	2.03	2.49	2.34	3.04	2.84
Cushion Both Sides (C1)	N/A	N/A	2.16	2.16	2.66	2.66	2.98	2.98	3.65	3.65
Cushion CCW Side (C2)	N/A	N/A	1.63	2.16	2.03	2.66	2.34	2.98	2.84	3.65
Cushion CW Side (C3)	N/A	N/A	2.16	1.63	2.66	2.03	2.98	2.34	3.65	2.84
Oil Service Seals (S)	1.93	1.93	2.18	2.18	2.34	2.34	2.77	2.77	3.38	3.38
Oil Service with Angle Adjustment (AS)	N/A	N/A	N/A	N/A	2.97	2.97	3.41	3.41	4.19	4.19

Note: Option A- Angle Adjustment and Option M- Magnetic Position Sensing is found on pages 369-370.

"CCW Side" refers to the extreme rotation of the shaft in the counter-clockwise direction as viewed from the mounting pilot side of the actuator.


The location of the optional feature chosen will be on tube B for single rack actuators.

"CW Side" refers to the extreme rotation of the shaft in the clockwise direction as viewed from the mounting pilot side of the actuator.

The location of the optional feature chosen will be on tube A for single rack actuators.

Dimensions

Double Rack Models (in)

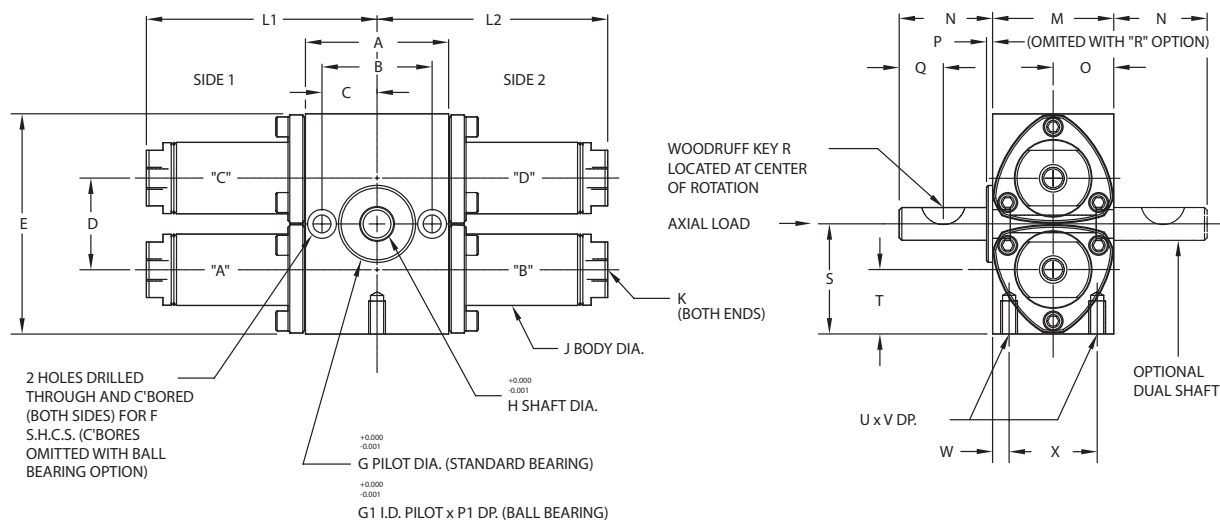

NOTE: Body retainer on 2" bore has 4 corners. L1/L2 dimensions shown in chart on page 365.

Bore	A	B	C	D	E	F (C' Bores Omitted with Ball Bearing Option)	G (Std Bearing O.D. Pilot Dia.)
9/16" (014)	1.38	1.00	0.50	0.83	2.06	#8 S.H.C.S.	0.675
3/4" (033)	1.62	1.25	0.62	1.04	2.50	#10 S.H.C.S.	0.875
1-1/16" (074)	1.88	1.44	0.72	1.36	3.12	1/4" S.H.C.S.	0.968
1-1/2" (196)	2.38	1.81	0.90	1.88	4.19	5/16" S.H.C.S.	1.249
2" (494)	3.00	2.38	1.19	2.56	5.13	5/16" S.H.C.S.	1.749

Bore	G1 (Ball Bearing I.D. Pilot)	H	J	K	M	N	O	P	P1
9/16" (014)	0.750	0.250	0.61	#10-32 1	1.12	0.69	0.56	0.06	0.06
3/4" (033)	0.875	0.375	0.82	#10-32 1	1.37	1.06	0.69	0.06	0.06
1-1/16" (074)	1.125	0.500	1.12	1/8 NPT	1.75	1.31	0.88	0.06	0.09
1-1/2" (196)	1.375	0.625	1.56	1/8 NPT	2.25	1.38	1.12	0.09	0.09
2" (494)	1.875	0.875	2.08	1/4 NPT	2.56	2.00	1.28	0.11	0.10

Bore	Q	R2	S	T	U	V	W	X
9/16" (014)	0.31	#202.5	1.03	0.61	#8-32	0.44	0.19	0.75
3/4" (033)	0.50	#204	1.25	0.73	#10-24	0.38	0.19	1.00
1-1/16" (074)	0.62	#305	1.56	0.88	1/4-20	0.50	0.25	1.25
1-1/2" (196)	0.62	#405	2.09	1.16	5/16-18	0.62	0.31	1.62
2" (494)	0.75	#606	2.56	1.28	5/16-18	0.62	0.28	2.00


¹ Option-S ports are 1/8 NPT (bodies "A" and "C" only).

² Key dimensions on page 369.

Dimensions

Double Rack Options (in)

(Dimensional variations from standard as shown.)

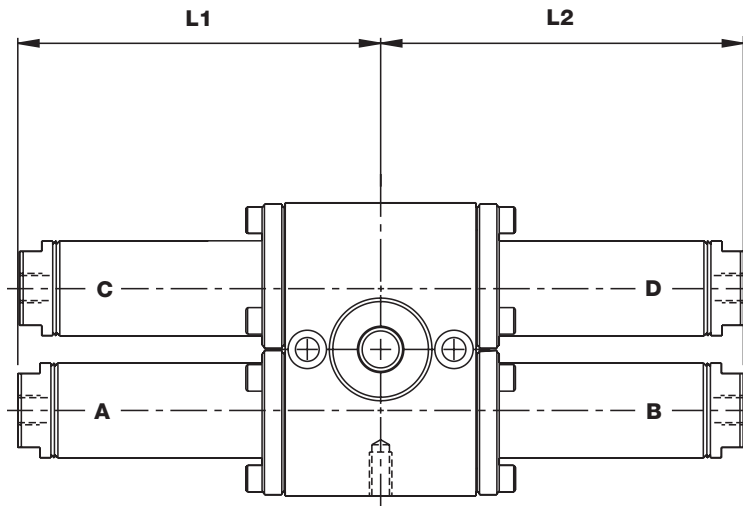

SIDE 1

SIDE 2

	9/16" (014)		3/4" (033)		1-1/16" (074)		1-1/2" (196)		2" (494)	
	L1	L2	L1	L2	L1	L2	L1	L2	L1	L2
Adder Per Degree of Rotation	0.0048	0.0048	0.0066	0.0066	0.0073	0.0073	0.0097	0.0097	0.0137	0.0137
Plus One Length Adder Below Per Side										
Base Unit (No Options)	1.52	1.57	1.63	1.68	2.03	2.08	2.34	2.39	2.84	2.89
Bumper Both Sides (B1)	1.64	1.57	1.77	1.68	2.18	2.08	2.49	2.39	3.04	2.89
Bumper CCW Side (B2)	1.64	1.57	1.77	1.68	2.18	2.08	2.49	2.39	3.04	2.89
Bumper CW Side (B3)	1.64	1.57	1.77	1.68	2.18	2.08	2.49	2.39	3.04	2.89
Cushion Both Sides (C1)	N/A	N/A	2.16	1.68	2.66	2.08	2.98	2.39	3.65	2.89
Cushion CCW Side (C2)	N/A	N/A	2.16	1.68	2.66	2.08	2.98	2.39	3.65	2.89
Cushion CW Side (C3)	N/A	N/A	2.16	1.68	2.66	2.08	2.98	2.39	3.65	2.89
Oil Service Seals (S)	1.93	1.57	2.18	1.68	2.34	2.08	2.77	2.39	3.38	2.89
Oil Service with Angle Adjustment (AS)	N/A	N/A	N/A	N/A	2.97	2.08	3.41	2.39	4.19	2.89


"CCW Side" refers to the extreme rotation of the shaft in the counter-clockwise direction as viewed from the mounting pilot side of the actuator.

The location of the optional feature chosen will be on tube C for single rack actuators.

"CW Side" refers to the extreme rotation of the shaft in the clockwise direction as viewed from the mounting pilot side of the actuator.

The location of the optional feature chosen will be on tube A for double rack actuators.

Dimensions (Three Position Models)

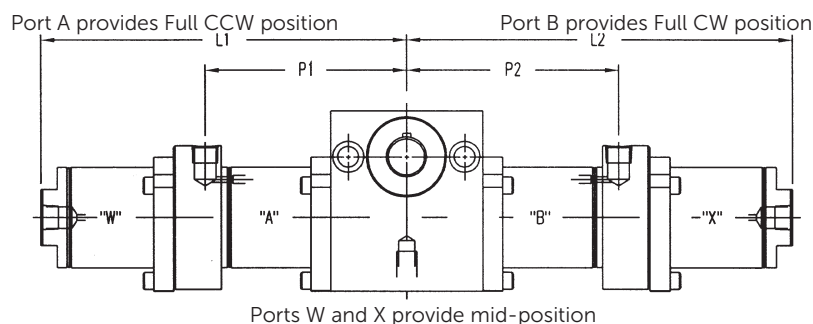

Single Rack Model Dimensions

	9/16" (006)				3/4" (017)				1-1/16" (037)			
	P1	P2	L1	L2	P1	P2	L1	L2	P1	P2	L1	LR
Degrees of Full Rotation Adder per degree of rotation	Full rot. 0.0048	Full rot. 0.0048	Full rot. 0.0048	Full rot. 0.0048	Full rot. 0.0066	Full rot. 0.0066	Full rot. 0.0066	Full rot. 0.0066	Full rot. 0.0073	Full rot. 0.0073	Full rot. 0.0073	Full rot. 0.0073
Degree of Stop Rotation	2nd stop	1st stop	2nd stop	1st stop	2nd stop	1st stop	2nd stop	1st stop	2nd stop	1st stop	2nd stop	1st stop
Adder per degree of rotation	N/A	N/A	0.0048	0.0048	N/A	N/A	0.0066	0.0066	N/A	N/A	0.0073	0.0073
Base Unit (No Option)	1.41	1.41	2.82	2.82	1.63	1.63	3.05	3.05	2.03	2.03	3.89	3.89
Bumpers Both Sides (B1)	1.53	1.53	3.06	3.06	1.77	1.77	3.33	3.33	2.18	2.18	4.19	4.19
Bumper CCW Side (B2)	1.41	1.53	2.82	3.06	1.63	1.77	3.05	3.33	2.03	2.18	3.89	4.19
Bumper CW Side (B3)	1.53	1.41	3.06	2.82	1.77	1.63	3.33	3.05	2.18	2.03	4.19	3.89
Cushion/Flow Both Sides (C1) (Q1)	N/A	N/A	N/A	N/A	1.63	1.63	3.58	3.58	2.03	2.03	4.51	4.51
Cushion/Flow CCW Side (C2) (Q2)	N/A	N/A	N/A	N/A	1.63	1.63	3.05	3.58	2.03	2.03	3.89	4.51
Cushion/Flow CW Side (C3) (Q3)	N/A	N/A	N/A	N/A	1.63	1.63	3.58	3.05	2.03	2.03	4.51	3.89
Angle Adjustment Both Sides (A1)	1.41	1.41	3.05	3.05	1.63	1.63	3.27	3.27	2.03	2.30	4.28	4.28
Angle Adjustment CCW Side (A2)	1.41	1.41	2.82	3.05	1.63	1.63	3.05	3.27	2.03	2.03	3.89	4.28
Angle Adjustment CW Side (A3)	1.41	1.41	3.05	2.82	1.63	1.63	3.27	3.05	2.03	2.03	4.28	3.89

	1-1/2" (098)				2" (247)			
	P1	P2	L1	L2	P1	P2	L1	L2
Degrees of Full Rotation Adder per degree of rotation	full rot. 0.0097	full rot. 0.0097	full rot. 0.0097	full rot. 0.0097	full rot. 0.0137	full rot. 0.0137	full rot. 0.0137	full rot. 0.0137
Degree of Stop Rotation	2nd stop	1st stop	2nd stop	1st stop	2nd stop	1st stop	2nd stop	1st stop
Adder per degree of rotation	N/A	N/A	0.0048	0.0048	N/A	N/A	0.0066	0.0066
Base Unit (No Option)	2.28	2.28	4.39	4.39	2.81	2.81	5.13	5.13
Bumpers Both Sides (B1)	2.43	2.43	4.69	4.69	3.01	3.01	5.53	5.53
Bumper CCW Side (B2)	2.28	2.43	4.39	4.69	2.81	3.01	5.13	5.53
Bumper CW Side (B3)	2.43	2.28	4.69	4.39	3.01	2.81	5.53	5.13
Cushion/Flow Both Sides (C1) (Q1)	2.28	2.28	5.03	5.03	2.81	2.81	5.95	5.95
Cushion/Flow CCW Side (C2) (Q2)	2.28	2.28	4.39	5.03	2.81	2.81	5.13	5.95
Cushion/Flow CW Side (C3) (Q3)	2.28	2.28	5.03	4.39	2.81	2.81	5.95	5.13
Angle Adjustment Both Sides (A1)	2.28	2.28	4.80	4.80	2.81	2.81	5.66	5.66
Angle Adjustment CCW Side (A2)	2.28	2.28	4.39	4.80	2.81	2.81	5.13	5.66
Angle Adjustment CW Side (A3)	2.28	2.28	4.80	4.39	2.81	2.81	5.66	5.13

**Select Magnetic Position Sensing adder from MRS table

MRS Length Adder (in)					
Total Rot. Degrees	006/014	017/033	037/074	098/196	247/494
45°	0.66	0.66	0.75	0.75	0.75
90°	0.55	0.52	0.59	0.53	0.44
180°	0.34	0.22	0.26	0.09	0.00
270°	0.12	0.00	0.00	0.00	0.00
360°	0.00	0.00	0.00	0.00	0.00


NOTE: Overall length calculator spreadsheet available.
Contact the Technical Assistance Center for details.

Single rack overall width calculation:

PT-098180/045-8C1--Using the chart above, calculate L1 and L2 dimensions as follows:

- L1 = total rotation (180) * (.0097) full rotation adder + degrees to 2nd stop (135) * (.0097) 2nd stop rotation adder + cushion adder (5.03")
- L2 = total rotation (180) * (.0097) full rotation adder + degrees to 1st stop (45) * (.0097) 1st stop rotation adder + cushion adder (5.03")
- [L1 = (1.746" + 1.310" + 5.03") = 8.086"] + [L2 = (1.746" + .437 + 5.03") = 7.213"]; Total width = 8.086" + 7.213" = 15.30"

Dimensions (Three Position Models)

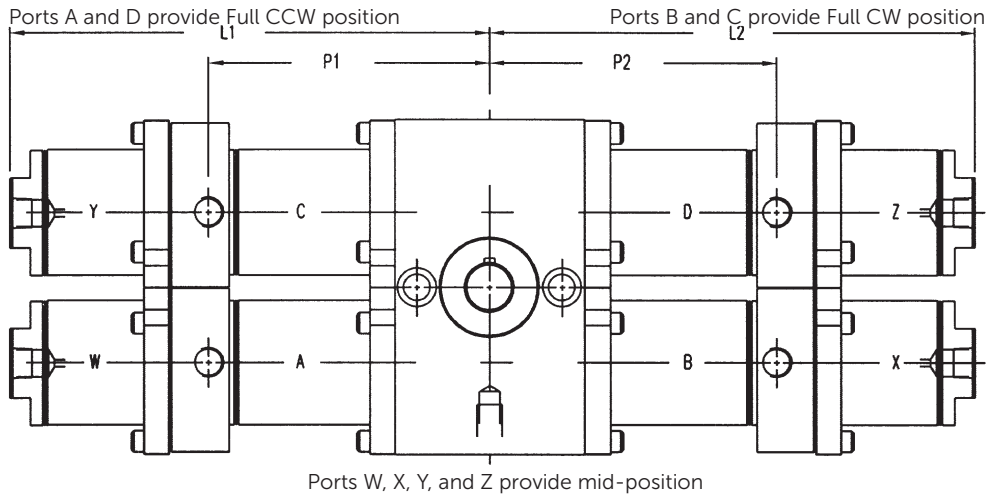

Double Rack Model Dimensions

	9/16" (014)				3/4" (033)				1-1/16" (074)			
	P1	P2	L1	L2	P1	P2	L1	L2	P1	P2	L1	LR
Degrees of Full Rotation Adder per degree of rotation	full rot. 0.0048	full rot. 0.0048	full rot. 0.0048	full rot. 0.0048	full rot. 0.0066	full rot. 0.0066	full rot. 0.0066	full rot. 0.0066	full rot. 0.0073	full rot. 0.0073	full rot. 0.0073	full rot. 0.0073
*Degrees to longest stop Adder per degree of rotation	Stop rot. N/A	Stop rot. N/A	Stop rot. 0.0048	Stop rot. 0.0048	Stop rot. N/A	Stop rot. N/A	Stop rot. 0.0066	Stop rot. 0.0066	Stop rot. N/A	Stop rot. N/A	Stop rot. 0.0073	Stop rot. 0.0073
Base Unit (No Option)	1.41	1.46	2.82	2.87	1.63	1.68	3.05	3.10	2.03	2.08	3.89	3.94
Bumpers Both Sides (B1)	1.53	1.46	3.06	2.87	1.77	1.68	3.33	3.10	2.18	2.08	4.19	3.94
Bumper CCW Side (B2)	1.53	1.46	3.06	2.87	1.77	1.68	3.33	3.10	2.18	2.08	4.19	3.94
Bumper CW Side (B3)	1.53	1.46	3.06	2.87	1.77	1.68	3.33	3.10	2.18	2.08	4.19	3.94
Cushion/Flow Both Sides (C1) (Q1)	N/A	N/A	N/A	N/A	1.63	1.68	3.58	3.10	2.03	2.08	4.51	3.94
Cushion/Flow CCW Side (C2) (Q2)	N/A	N/A	N/A	N/A	1.63	1.68	3.58	3.10	2.03	2.08	4.51	3.94
Cushion/Flow CW Side (C3) (Q3)	N/A	N/A	N/A	N/A	1.63	1.68	3.58	3.10	2.03	2.08	4.51	3.94
Angle Adjustment Both Sides (A1)	1.41	1.46	3.05	2.87	1.63	1.68	3.27	3.10	2.03	2.08	4.28	3.94
Angle Adjustment CCW Side (A2)	1.41	1.46	3.05	2.87	1.63	1.68	3.27	3.10	2.03	2.08	4.28	3.94
Angle Adjustment CW Side (A3)	1.41	1.46	3.05	2.87	1.63	1.68	3.27	3.10	2.03	2.08	4.28	3.94

	1-1/2" (196)				2" (494)			
	P1	P2	L1	L2	P1	P2	L1	L2
Degrees of Full Rotation Adder per degree of rotation	full rot. 0.0097	full rot. 0.0097	full rot. 0.0097	full rot. 0.0097	full rot. 0.0137	full rot. 0.0137	full rot. 0.0137	full rot. 0.0137
Degree of Stop Rotation Adder per degree of rotation	Stop rot. N/A	Stop rot. N/A	Stop rot. 0.0097	Stop rot. 0.0097	Stop rot. N/A	Stop rot. N/A	Stop rot. 0.0137	Stop rot. 0.0137
Base Unit (No Option)	2.28	2.33	4.39	4.44	2.81	2.86	5.13	5.18
Bumpers Both Sides (B1)	2.43	2.33	4.69	4.44	3.01	2.86	5.53	5.18
Bumper CCW Side (B2)	2.43	2.33	4.69	4.44	3.01	2.86	5.53	5.18
Bumper CW Side (B3)	2.43	2.33	4.69	4.44	3.01	2.86	5.53	5.18
Cushion/Flow Both Sides (C1) (Q1)	2.28	2.33	5.03	4.44	2.81	2.86	5.95	5.18
Cushion/Flow CCW Side (C2) (Q2)	2.28	2.33	5.03	4.44	2.81	2.86	5.95	5.18
Cushion/Flow CW Side (C3) (Q3)	2.28	2.33	5.03	4.44	2.81	2.86	5.95	5.18
Angle Adjustment Both Sides (A1)	2.28	2.33	4.80	4.44	2.81	2.86	5.66	5.18
Angle Adjustment CCW Side (A2)	2.28	2.33	4.80	4.44	2.81	2.86	5.66	5.18
Angle Adjustment CW Side (A3)	2.28	2.33	4.80	4.44	2.81	2.86	5.66	5.18

NOTE: Overall length calculator spreadsheet available. Contact the Technical Assistance Center for details.

*Select Magnetic Position Sensing adder from MRS table.


** Largest stop rotation is used for double rack models to calculate overall L1 and L2 length. Double rack models - one body on each side will be shorter if the shaft mid-position is not 1/2 of the total rotation, the above calculation still provides the units overall width.

Double rack overall width calculation:**

PT-196180/045-8C1--Using the chart above, calculate L1 and L2 dimensions as follows:

- L1 = Total rotation (180) * (.0097) Full rotation adder + Largest Degrees stop (135) * (.0097) stop rotation adder + Cushion adder (5.03")
- L2 = Total rotation (180) * (.0097) Full rotation adder + Largest Degrees stop (135) * (.0097) stop rotation adder + Cushion adder (4.44")
- [L1 = (1.746" + 1.310" + 5.03") = 8.086"] + [L2 = (1.746" + 1.310" + 4.44") = 7.496"]; Total width = 8.086" + 7.496" = 15.58"

Dowel Pin Hole Locations

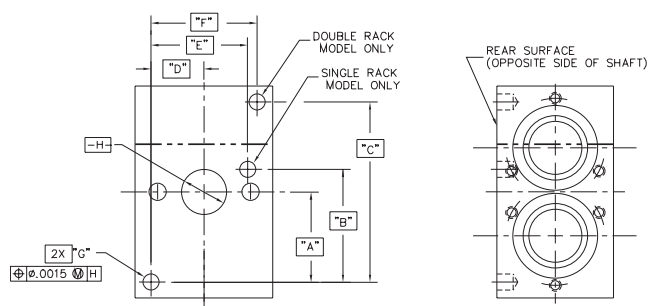


Bore	A	B	C	D
020 (9/16")	.874	1.101	1.754	.500
040 (3/4")	1.061	1.330	2.125	.623
090 (1-1/16")	1.311	1.730	2.625	.718
170 (1-1/2")	1.811	2.281	3.625	.905
310 (2")	2.187	3.000	4.375	.625

Bore	E	F	G
020 (9/16")	.928	1.000	.1270/.1280 x .240/.260 DP.
040 (3/4")	1.139	1.250	.1895/.1905 x .410/.430 DP.
090 (1-1/16")	1.437	1.437	.2520/.2530 x .410/.430 DP.
170 (1-1/2")	1.812	1.812	.3145/.3155 x .560/.580 DP.
310 (2")	1.813	1.250	.3770/.3780 x .560/.580 DP.


Application Possibilities

Picture the possibilities. Consider the many benefits of using the IMI Bimba Pneu-Turn Rotary Actuator: compact, space-saving design, lightweight, corrosion-resistant components, and low cost. Now, using the pictures on this page as a springboard, you can understand that the applications are limitless. All you need is your imagination and a IMI Bimba Pneu-Turn Rotary Actuator.


Transferring

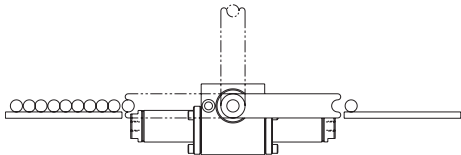


Camming




Bending (Tube or Wire)




Indexing

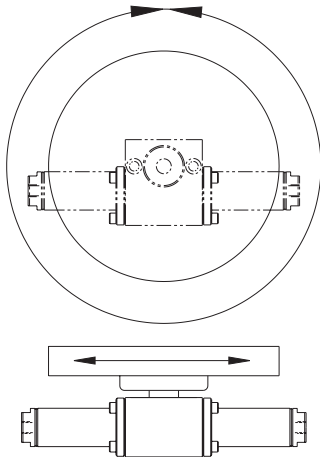


Unloading




Opening/Closing

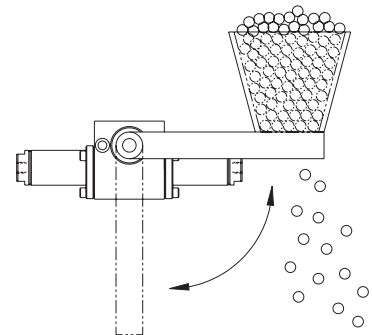


Turning




Clamping

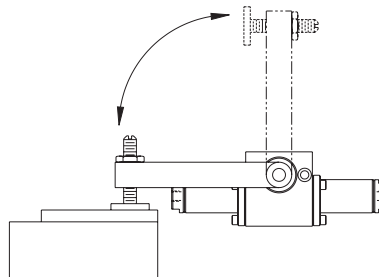


Mix/Agitate




Screw/Clamping



Feeding




Valve Actuator



Options

MRS® Magnetic Position Sensing


Magnetic pistons are located on the A and B tubes of both the single and double rack rotary actuators, guaranteeing switch operation at any point in the rotation.

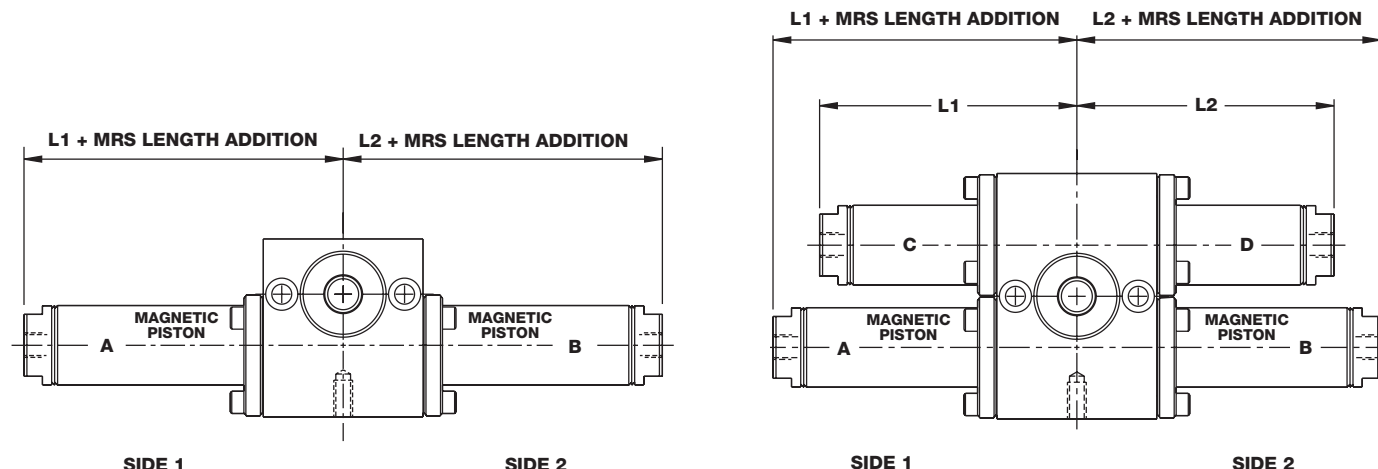

MRS® Length Adder (in)

Degrees	006/014	017/033	037/074	098/196	247/494
45°	0.66	0.66	0.75	0.75	0.75
90°	0.55	0.52	0.59	0.53	0.44
180°	0.34	0.22	0.26	0.09	0.00
270°	0.12	0.00	0.00	0.00	0.00
360°	0.00	0.00	0.00	0.00	0.00


Woodruff Key (in)

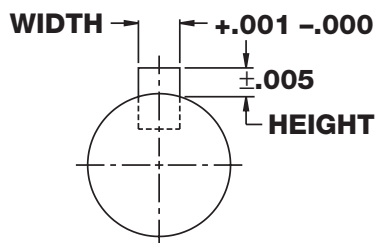


Key No.	Width	Height
202.5	0.0625	0.032
204	0.0625	0.032
305	0.0938	0.047
405	0.1250	0.063
606	0.1875	0.094

Flat Key (in)

(006 and 014)

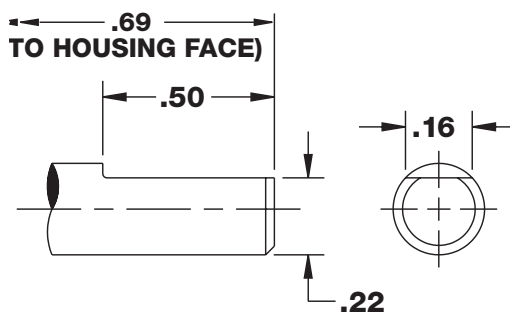


Square Key Option (in)

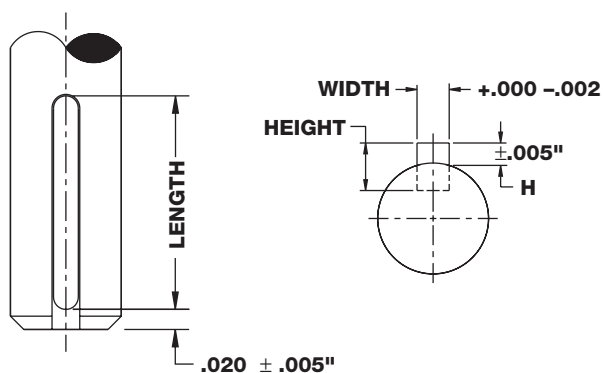


Bore Size	Length	Width	Height	H
3/4" (017 / 033)	.718	.094	.094	.047
1-1/16" (037 / 074)	.797	.125	.125	.063
1-1/2" (098 / 196)	.797	.188	.188	.094
2" (247 / 494)	1.781	.25	.25	.125

Option Dimensions (in.)


Cushion (C Option)

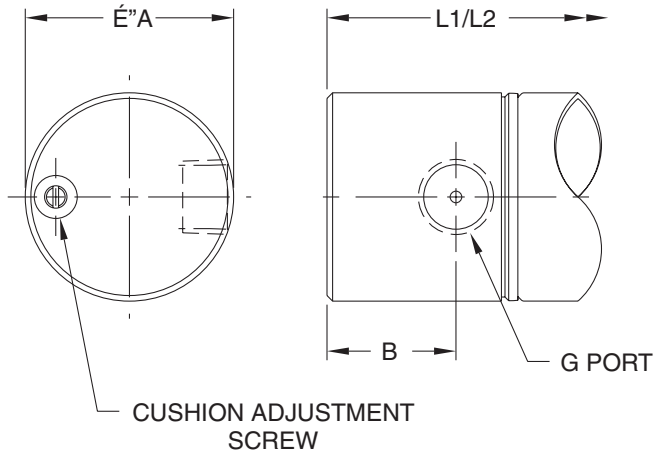


Angle Adjustment with Oil Service Seals (AS Option)

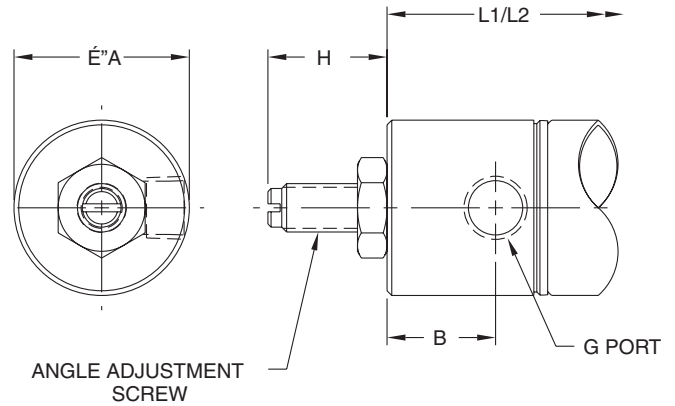

Angle Adjustment with Cushion (AC Option)

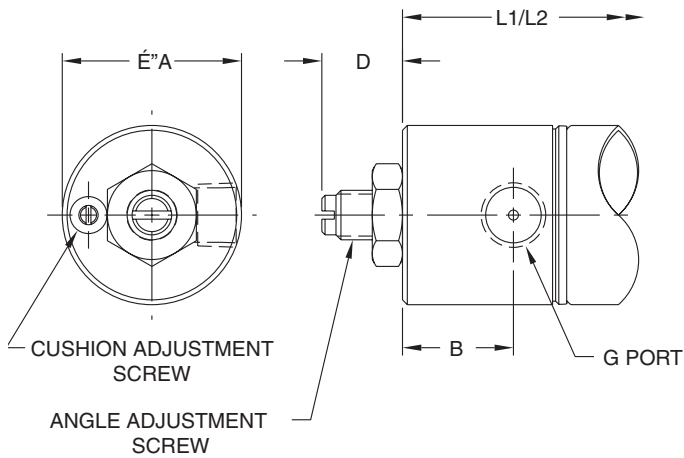

Angle Adjustment (A Option)

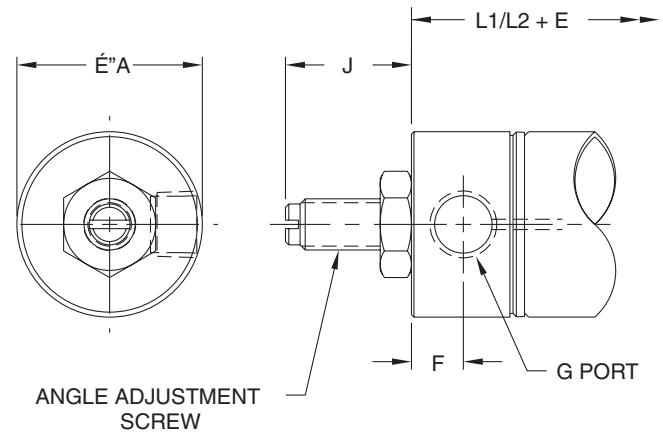

Bore	A	B	D	E	F	G	H	J
9/16" (006)	0.81	N/A	N/A	0.23	0.24	#10-32	N/A	0.53
9/16" (014)	0.81	N/A	N/A	0.23	0.24	#10-32	N/A	0.53
3/4" (017)	0.87	0.41	0.48	0.22	0.23	#10-32	N/A	0.71
3/4" (033)	0.87	0.41	0.48	0.22	0.23	#10-32	N/A	0.71
1-1/16" (037)	1.11	0.69	0.51	0.40	0.31	1/8 NPT	0.76	0.76
1-1/16" (074)	1.11	0.69	0.51	0.40	0.31	1/8 NPT	0.76	0.76
1-1/2" (098)	1.56	0.77	0.60	0.42	0.34	1/8 NPT	0.94	0.94
1-1/2" (196)	1.56	0.77	0.60	0.42	0.34	1/8 NPT	0.94	0.94
2" (247)	2.08	0.87	0.80	0.53	0.41	1/4 NPT	1.28	1.28
2" (494)	2.08	0.87	0.80	0.53	0.41	1/4 NPT	1.28	1.28

Option N

Low Temperature Seals

Option N (Low Temperature Operation) is now available as a standard catalog offering. Pneu-Turns with seals and lubricant allowing operation to -40° F can now be ordered directly from the catalog. Please note when ordering this option that cylinder performance may be affected beginning at temperatures below -20° F.

Operational Note: Dry air with a dew point below the lowest temperature the actuator will experience or dry nitrogen is recommended.

Product Availability: 3 business days

Option Q

Internal Flow Control

Internal flow control is now available as a standard catalog option in bore sizes 3/4", 1-1/16", 1-1/2", and 2"; both single and double rack models. Use this option as a space saving feature and to avoid "tampering" associated with externally installed flow controls.

Flow control is achieved using a sealing disk that restricts the flow of air to the port when the piston moves towards the end cap. The restricted air is channeled through a small orifice within the end cap, on its way to the exhaust port. Controlling the flow through this orifice is achieved by adjusting a screw located on the face of the end cap. Single rack units: Clockwise (CW) and counter-clockwise (CCW) rotational flow is controlled using the end cap adjustment screw, opposite the direction of the shaft. Double rack units: CW rotation flow is adjusted using the screw in the lower end cap; CCW rotational flow is adjusted using the screw in the upper end cap. Bore sizes 3/4" and 1-1/16" provide three turns of adjustment. All larger bore sizes provide four turns of adjustment.


Option designators:

Q1 - Internal flow control (both sides)

Q2 - Internal flow control (counter-clockwise rotation)

Q3 - Internal flow control (clockwise rotation)

Product Availability: 3 business days



Option Q - Dimensional Variations from Standard (in.)


Single Rack	9/16" (006)		3/4" (017)		1-1/16" (037)		1-1/2" (098)		2" (247)	
	L1	L2	L1	L2	L1	L2	L1	L2	L1	L2
Adder per Degree of Rotation	-		0.0066	0.0066	0.0073	0.0073	0.0097	0.0097	0.0137	0.0137
Flow Control Both Sides (Q1)	N/A	N/A	2.16	2.16	2.66	2.66	2.98	2.98	3.65	3.65
Flow Control Both Sides (Q2)	N/A	N/A	1.63	2.16	2.03	2.66	2.34	2.98	2.84	3.65
Flow Control Both Sides (Q3)	N/A	N/A	2.16	1.63	2.66	2.03	2.98	2.34	3.65	2.84

Double Rack	Degree of Rotation Adder Same as Single Rack									
	9/16" (014)		3/4" (033)		1-1/16" (074)		1-1/2" (196)		2" (494)	
	L1	L2	L1	L2	L1	L2	L1	L2	L1	L2
Flow Control Both Sides (Q1)	N/A	N/A	2.16	1.68	2.66	2.08	2.98	2.39	3.65	2.89
Flow Control Both Sides (Q2)	N/A	N/A	2.16	1.68	2.66	2.08	2.98	2.39	3.65	2.89
Flow Control Both Sides (Q3)	N/A	N/A	2.16	1.68	2.66	2.08	2.98	2.39	3.65	2.89


Switch Track (T Option)

Track Locations (All other dimensions remain unchanged)


Standard "T" All Bores

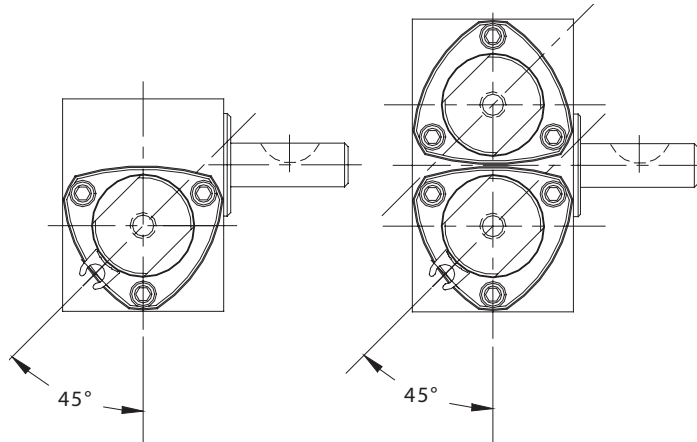



All Other Options All Bores Except 3/4 & 9/16

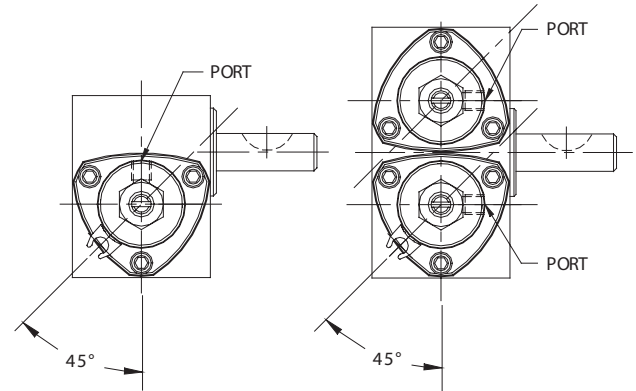

"At" For 3/4 9/16 Bore

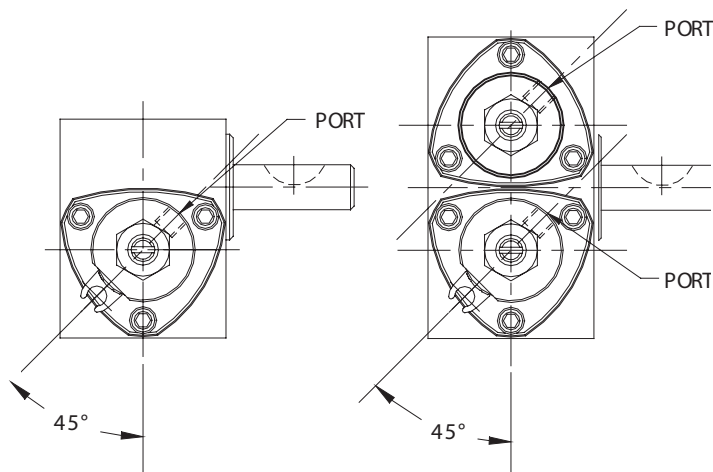

"Act" & "Ct" For 3/4 Bore

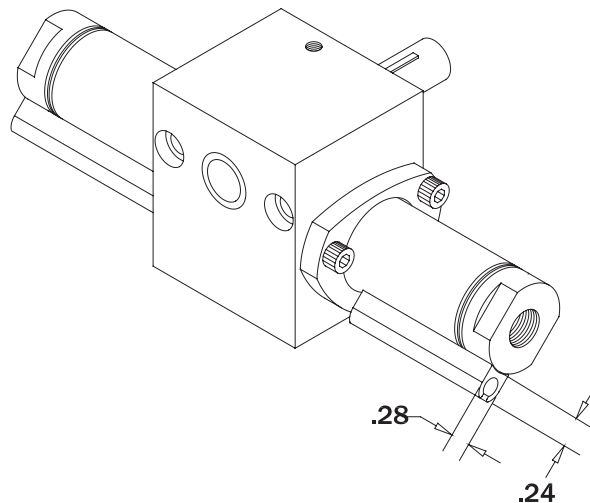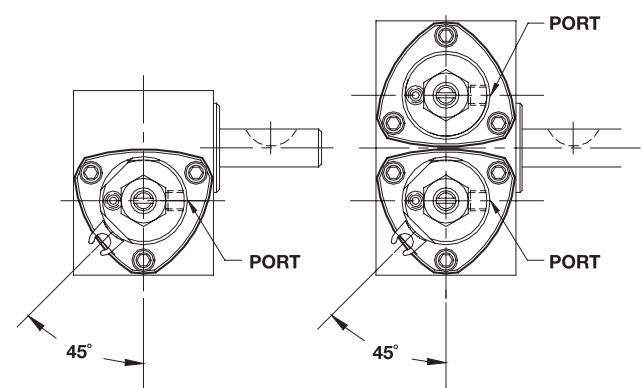

Double Rack Z2 and Z3 Option (in.)


(Dimensional variations from standard as shown.)

Z2 Option

- Adder applies to L1 and L2, bodies A and D only

Z3 Option

- Adder applies to L1 and L2, bodies C and B only

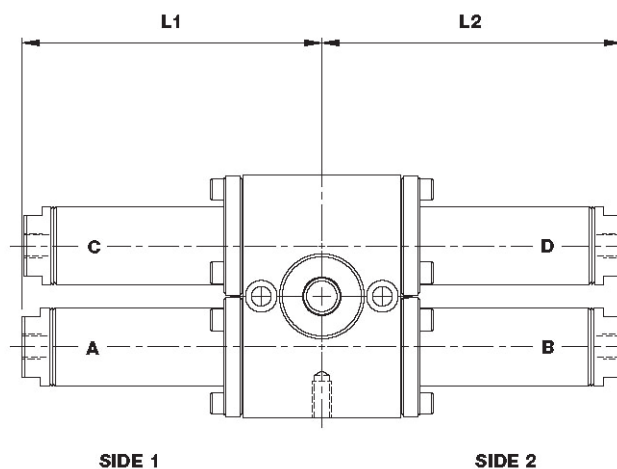

Single Rack Z2 and Z3 Option (in.)


(Dimensional variations from standard as shown.)

Z2 Option

- Adder applies to L1 dimension

Z3 Option

- Adder applies to L2 dimension

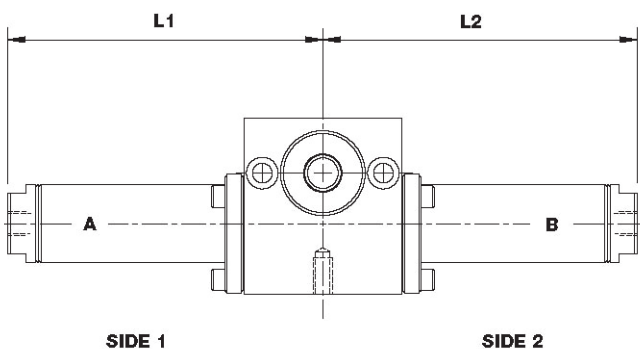

Length Adder for Return Spring Option in Inches, per Body

Bore Size	0- 75°	0- 90°	0- 120°	0- 150°	76- 150°	91- 180°	151- 225°	121- 240°	181- 270°	151- 300°	226- 300°	241- 360°	271- 360°	301- 360°
9/16"	-	.688	-	-	-	1.313	-	-	1.938	-	-	-	2.563	-
3/4"	-	-	-	.750	-	-	-	-	-	1.438	-	-	-	2.126
1-1/16"	-	-	.813	-	-	-	-	1.375	-	-	-	1.937	-	-
1-1/2"	-	.751	-	-	-	1.439	-	-	2.127	-	-	-	2.815	-
2"	1.262	-	-	-	2.262	-	2.512	-	-	-	4.450	-	-	4.812

Bore Size	Torque generated by spring (in-lbs.)	
	Pre-load	Final
9/16"	0.5	1.0
3/4"	1.0	2.0
1-1/16"	1.0	2.5
1-1/2"	4.0	8.0
2"	12.0	24.0



The model number of Pneu-Turn rotary actuators consists of an alphanumeric cluster designating product type, series, angle of rotation, and other optional components that together make up the complete part number to use in ordering. Use the ordering information below to build a valid part number.

An example of a basic Pneu-Turn unit with 1-1/16" bore, single rack, 90° angle of rotation, angle adjustment on both sides, dual shaft, and the high temperature option is shown here.

Angle of Rotation	
045	45
090	90
180	180
270	270
360	360

PT - 037 090 - A1 D V

Bore Size	
006	9/16" bore, single rack
014	9/16", double rack
017	3/4" bore, single rack
033	3/4" bore, double rack
037	1-1/16" bore, single rack
074	1-1/16" bore, double rack
098	1-1/2" bore, single rack
196	1-1/2" bore, double rack
247	2" bore, single rack
494	2" bore, double rack

Options	
A1	Angle adjustment (both sides)
A2	Angle adjustment (counter-clockwise rotation)
A3	Angle adjustment (clockwise rotation)
B1	Bumpers (both sides)
B2	Bumper (counter-clockwise rotation)
B3	Bumper (clockwise rotation)
C1	Cushions (both sides) ¹
C2	Cushion (counter-clockwise rotation) ¹
C3	Cushion (clockwise rotation) ¹
D	Dual shaft
E	Rear shaft (front portion of dual shaft removed to accommodate hanging axial load)
F	Hardened shaft ²
G	Polymer grease
K	Square key ³
M	Magnetic position sensing ⁴
N	Low temperature option (-40° F) ⁵
Q1	Internal flow control (both sides) ⁶
Q2	Internal flow control (counter-clockwise rotation only) ⁶
Q3	Internal flow control (clockwise rotation only) ⁶
R	Ball bearing ²
S	Seals - oil service ⁷
T	Switch track ⁸
V	High temperature option (0° F to 400° F)
X	Anti-backlash (for 1-1/16" to 2" bores only) ⁹
Z2 ¹⁰	Spring return, side A single rack, bodies A and D double rack
Z3 ¹⁰	Spring return, side B single rack, bodies C and B double rack

NOTES:

¹ Not available in Series 006 or 014. See below for option combination availability. See pages 362 and 364 for explanation of clockwise/counter-clockwise.

² When ordering option F, option R must be ordered. Option R will include dowel pin holes. Dowel pin hole locations shown in Related Products section of this catalog.

³ 006 and 014 have flat shaft.

⁴ Option M can be ordered with option V, but option V's rating will change to 180° F.

⁵ Low temperature bumpers not available.

⁶ 3/4", 1-1/16", 1-1/2", 2" bore only.

⁷ Oil service applications require 40 psi at all times or leakage will occur. 1/8 NPT ports provided (orifice omitted) for 9/16" and 3/4" bores. For double rack models, oil service seals and 1/8" ports provided on bodies A and C only.

⁸ Option T must be ordered in conjunction with Option M. Option M can be ordered with Option V, but Option V's rating will change to 180° F. See Switch Products section of this catalog for additional switch information.

⁹ Option X (Anti-backlash) is available in bore sizes 1-1/16", 1-1/2" and 2", single and double rack up to 360° rotation. This option eliminates mid-rotational and end of rotation backlash in single rack models. It also eliminates mid-rotational backlash in double rack models. Double rack models do not have end of rotation backlash. All Pneu-Turns with this option include ball bearings Option R. Use this option to provide smooth rotation along with rotational precision.

¹⁰ Z2 and Z3 options cannot be ordered together. If spring return on both sides is desired, contact Technical Support and request a special. Z2 may be combined with A2 or B2. Z3 may be combined with A3 or B3.


The model number of Three Position Pneu-Turn rotary actuators consists of an alphanumeric cluster designating product type, bore size, total rotation, degrees to mid-position, position of the shaft key at the mid-rotational position, and other optional components that together make up the complete part number to use in ordering. Use the ordering information below to build a valid part number.

An example of a basic Three Position Pneu-Turn unit with 1-1/2" bore, single rack, 225° angle of rotation, 45° rotation to middle position, key located at mid-position 8, and angle adjustment on both sides is shown here.

Angle of Total Rotation
Degrees to mid-position

PT - 098 225/045 - 8 A1


Bore Size	
006	9/16" bore, single rack
014	9/16", double rack
017	3/4" bore, single rack
033	3/4" bore, double rack
037	1-1/16" bore, single rack
074	1-1/16" bore, double rack
098	1-1/2" bore, single rack
196	1-1/2" bore, double rack
247	2" bore, single rack
494	2" bore, double rack

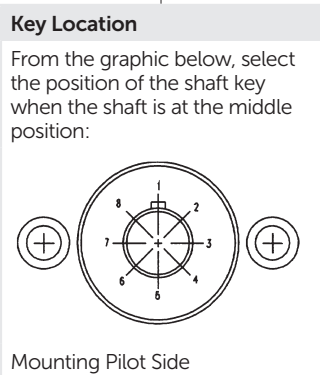

All other key positions are available.
Contact your IMI Bimba distributor.

Options	
A1	Angle adjustment (both sides)
A2	Angle adjustment (counter-clockwise rotation)
A3	Angle adjustment (clockwise rotation)
B1	Bumpers (both sides)
B2	Bumper (counter-clockwise rotation)
B3	Bumper (clockwise rotation)
C1	Cushions (both sides) ¹
C2	Cushion (counter-clockwise rotation) ¹
C3	Cushion (clockwise rotation) ¹
D	Dual shaft
E	Rear shaft (front portion of dual shaft removed to accommodate hanging axial load)
F	Hardened shaft ²
G	Polymer grease
K	Square key ³
M	Magnetic position sensing ⁴
N	Low temperature option (-40° F) ⁵
Q1	Internal flow control (both sides) ⁶
Q2	Internal flow control (counter-clockwise rotation only) ⁶
Q3	Internal flow control (clockwise rotation only) ⁶
R	Ball bearing ²
S	Seals - oil service ⁷
V	High temperature option (0° F to 400° F)
X	Anti-backlash (for 1-1/16" to 2" bores only) ⁸
Z2 ⁹	Spring return, side A single rack, bodies A and D double rack
Z3 ⁹	Spring return, side B single rack, bodies C and B double rack

Mounting Pilot Side View

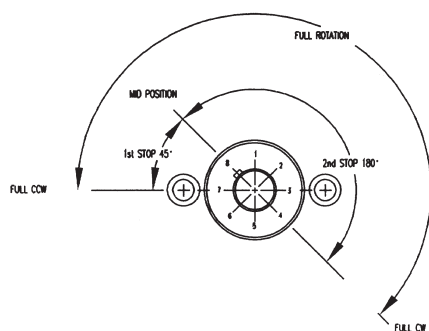

Example of rotation for PT-098225/045-8A1
Shaft Front View

NOTES:

¹ Not available in Series 006 or 014. See below for option combination availability. See pages 362 and 364 for explanation of clockwise/counter-clockwise.

² When ordering option F, option R must be ordered. Option R will include dowel pin holes. Dowel pin hole locations shown in Related Products section of this catalog.

³ 006 and 014 have flat shaft.

⁴ Option M can be ordered with option V, but option V's rating will change to 180° F.

⁵ Low temperature bumpers not available.

⁶ 3/4", 1-1/16", 1-1/2", 2" bore only.

⁷ Oil service applications require 40 psi at all times or leakage will occur. 1/8 NPT ports provided (orifice omitted) for 9/16" and 3/4" bores. For double rack models, oil service seals and 1/8" ports provided on bodies A and C only.

⁸ Option X (Anti-backlash) is available in bore sizes 1-1/16", 1-1/2" and 2", single and double rack up to 360° rotation. This option eliminates mid-rotational and end of rotation backlash in single rack models. It also eliminates mid-rotational backlash in double rack models. Double rack models do not have end of rotation backlash. All Pneu-Turns with this option include ball bearings Option R. Use this option to provide smooth rotation along with rotational precision.

⁹ Z2 and Z3 options cannot be ordered together. If spring return on both sides is desired, contact Technical Support and request a special. Z2 may be combined with A2 or B2. Z3 may be combined with A3 or B3.

Option Combination Availability

Due to design or compatibility restrictions, the following options may not be ordered in combination.
For example, F and E options are not available in combination.

Series	Options											
	A	B	C	D	E	F	N	Q	R*	S	X	Z
9/16" (006)	S	S	N/A	E	D,F,R,X	D,E,K	B,G,M,V	N/A	E	A,B		B,C
9/16" (014)		S	N/A	E	D,F,R,X	D,E,K	B,G,M,V	N/A	E	B		B,C
3/4" (017)	S	C,S	B,Q,S	E	D,F,R,X	D,E,K	B,G,M,Q,V	A,C,N,S	E	A,B,C		B,C
3/4" (033)		C,S	B,Q,S	E	D,F,R,X	D,E,K	B,G,M,Q,V	A,C,N,S	E	B,C		B,C
1-1/16" (037)		C,S	B,Q,S	E	D,F,R,X	D,E,K,X	B,G,M,Q,V	A,C,N,S	E	B,C	E,F	B,C
1-1/16" (074)		C,S	B,Q,S	E	D,F,R,X	D,E,K,X	B,G,M,Q,V	A,C,N,S	E	B,C	E,F	B,C
1-1/2" (098)		C,S	B,Q,S	E	D,F,R,X	D,E,K,X	B,G,M,Q,V	A,C,N,S	E	B,C	E,F	B,C
1-1/2" (196)		C,S	B,Q,S	E	D,F,R,X	D,E,K,X	B,G,M,Q,V	A,C,N,S	E	B,C	E,F	B,C
2" (247)		C,S	B,Q,S	E	D,F,R,X	D,E,K,X	B,G,M,Q,V	A,C,N,S	E	B,C	E,F	B,C
2" (494)		C,S	B,Q,S	E	D,F,R,X	D,E,K,X	B,G,M,Q,V	A,C,N,S	E	B,C	E,F	B,C

* Temperature range of ball bearing option with high temperature option is 0 °F to +250 °F.

Option T - "Switch track" should only be ordered with options M or V if the actuator will be operated between -20 ° to 85 °

Option Combination Availability (Three Position Models)

This chart provides the options that cannot be combined due to design or compatibility restrictions.
For example, F and E options are not available in combination.

Series	Option														
	A	B	C	D	E	F	G	K	M	N	Q	R	S	V	X
9/16" Single	S	N,Q,S	N/A	E,F	D,F,R	D,E,K	N,S	F	N	B,G,M,V	N/A	E	A,B,G	N	N/A
9/16" Double	S	N,Q,S	N/A	E,F	D,F,R	D,E,K	N,S	F	N	B,G,M,V	N/A	E	A,B,G	N	N/A
3/4" Single	Q,S	C,N,S	B,Q,S	E,F	D,F,R	D,E,K	N,S	F	N	B,G,M,Q,V	A,C,N,S	E	A,B,C,G,Q	N	N/A
3/4" Double	Q,S	C,N,S	B,Q,S	E,F	D,F,R	D,E,K	N,S	F	N	B,G,M,Q,V	A,C,N,S	E	A,B,C,G,Q	N	N/A
1-1/16" Single	Q	C,N,S	B,Q,S	E,F	D,F,R,X	D,E,K,X	N,S	F	N	B,G,M,Q,V	A,C,N,S	E	B,C,G,Q	N	E,F
1-1/16" Double	Q	C,N,S	B,Q,S	E,F	D,F,R,X	D,E,K,X	N,S	F	N	B,G,M,Q,V	A,C,N,S	E	B,C,G,Q	N	E,F
1-1/2" Single	Q	C,N,S	B,Q,S	E,F	D,F,R,X	D,E,K,X	N,S	F	N	B,G,M,Q,V	A,C,N,S	E	B,C,G,Q	N	E,F
1-1/2" Double	Q	C,N,S	B,Q,S	E,F	D,F,R,X	D,E,K,X	N,S	F	N	B,G,M,Q,V	A,C,N,S	E	B,C,G,Q	N	E,F
2" Single	Q	C,N,S	B,Q,S	E,F	D,F,R,X	D,E,K,X	N,S	F	N	B,G,M,Q,V	A,C,N,S	E	B,C,G,Q	N	E,F
2" Double	Q	C,N,S	B,Q,S	E,F	D,F,R,X	D,E,K,X	N,S	F	N	B,G,M,Q,V	A,C,N,S	E	B,C,G,Q	N	E,F

How to Order Repair Kits


To order individual parts, simply place the applicable "PT" number in front of your cylinder part number.

Example: for a replacement shaft/pinion assembly for part number PT-098180-A1C1, order part number PT2-PT-098180-A1C1. For the PT6 or PT3, specify the location at the end, i.e. PT6-PT-098180-A1C1-AB.


Part No.	Part Description	Options	Location
*PT1	Actuator Body	only possible option needed R	
*PT2	Shaft/Pinion Assembly	only possible options needed D, E, F, K, R	
*PT3	Front Shaft Bearing	only possible option needed R	
*PT4	Rear Shaft Bearing	only possible option needed R	
*PT5	Shaft Key	only possible option needed K	
*PT6	Piston/Rack Assembly	only possible options needed B, C, M, S, X	AB or CD
*PT7	Rack Support	only possible option needed X	
*PT8	Piston Seal	only possible options needed S, V	
*PT9	Piston Wear Ring	no options	
*PT10	Magnet	no options	
*PT11	Bumper	only possible options needed V	
*PT12	Bearing Retainer Set Screw	no options	
PT13	Body Assembly	only possible options needed A, B, C, M, S, T, V	A, B, C, or D
*PT14	Body Retainer Cap Screw	no options	
*PT15	Body Thread Seal	only possible options needed V	
*PT16	Body Thread Seal Ring	no options	
*PT17	Body Jam Nut	no options	
*PT18	Angle Adj. Screw	only possible options needed C, S (A if with S)	
*PT19	Retaining Ring	no options	
*PT20	Shim Package	no options	
#PT21	Shaft Spacers	no options	
*K-A-PT	Bearing Kit	only possible option needed R	
*K-L-PT	Seal Kit	only possible options needed S, V, N	
*K-S-PT	Shaft Kit	only possible options needed D, E, F, K, R	

IMI Bimba Pneu-Turn actuators are repairable. A list of the individual components is given below that together make up a Pneu-Turn actuator.


Standard Shaft



Ball Bearing (R) Option




3/4" Bore Model




9/16", 1-1/16", 1-1/2", 2" Bore Models

Single Rack Model



Double Rack Model

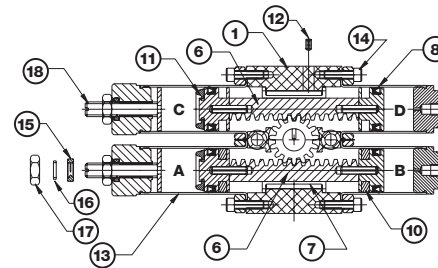

Repair Parts

No.	Part Description	Quantity Required	
		Single	Double
PT1	Actuator Body	1	1
PT2	Shaft/Pinion Assembly	1	1
PT3	Front Shaft Bearing	1	1
PT4	Rear Shaft Bearing	1	1
PT5	Shaft Key	1	1
PT6	Piston/Rack Assembly (Includes Rack, Roll Pins and 2 Pistons)	1	2
PT7	Rack Support	1	2
PT8	Piston Seal ¹	2	4
PT9	Piston Wear Ring (Required for Oil Service only)	2	2
PT10	Magnet	2	2

No.	Part Description	Quantity Required	
		Single	Double
PT11	Bumper	2	2
PT12	Bearing Retainer Set Screw	1	1
PT13	Cylinder Body Assembly (Includes Body, End Cap, and Retainer Ring)	2	4
PT14	Cylinder Body Retainer Cap Screw ³	6	12
PT15	Cylinder Body Thread Seal	2	2
PT16	Cylinder Body Thread Seal Ring	2	2
PT17	Cylinder Body Jam Nut	2	2
PT18	Angle Adjustment Screw	2	2
PT19	Retaining Ring	2	2
PT20	Shim Package	1	1
PT21	Shaft Spacers ²	1	1

Repair Kits

Bearing Kit (K-A-PT) ⁴		
PT3	Front Shaft Bearing	1
PT4	Rear Shaft Bearing	1

Shaft Kit (K-S-PT)		
PT2	Shaft/Pinion Assembly	1
PT5	Shaft Key	1

Seal Kit (K-L-PT) ¹		
PT8	Piston Seals	2

¹ Double Rack Models require two repair kits per rotary actuator. Oil Service Option: Single Rack models require four oil service seals or two oil service seal kits. Double Rack models require four oil service seals and two standard seals or two oil service seal kits and one standard seal kit.

² Used on 3/4" bore single and double rack units with Ball Bearing option.

³ 2" bore requires 8 or 16.

⁴ Bearing Kit for Ball Bearings includes retaining rings and shim package.